

Highcliff™ Bowl K-4368-B

Features

- Vitreous china.
- Elongated bowl.
- 1-1/2" top spud.
- 10" (254 mm) or 12" (305 mm) rough-in.
- 2-1/4" (57 mm) passageway.
- 11-3/8" (289 mm) x 10-3/8" (264 mm) water area.
- 1.6 gpf (6 lpf).
- Includes 4 bolt holes in base.
- 26" (660 mm) x 14-1/2" (368 mm) x 17-1/2" (445 mm).

Optional Accessories

K-13516 Manual 1.6 GPF WC Flushometer

K-10674-SV WAVE DC 1.6 GPF WC Flushometer

K-10957-SV Tripoint™ DC 1.6 GPF WC Flushometer

K-4654-A Commercial Toilet Seat

K-4670-C Commercial Toilet Seat

K-4670-CA Commercial Toilet Seat

K-10674 Wave DC 1.6 GPF WC Flushometer

K-10957 Tripoint™ DC 1.6 GPF WC Flushometer

Components

Additional included component/s: Spud, and Bolt cap accessory pack.



ADA CSA B651

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


0 White





K-4368-B



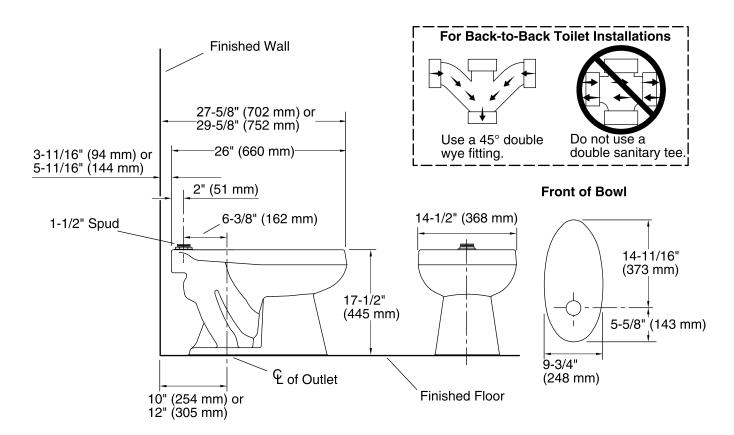

Technical Information

All product dimensions are nominal.

Toilet type: Flushometer, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Spud size: 1-1/2", Inlet, Top Trap passageway: 2-1/4" (57 mm)

Water surface size: 11-3/8" x 10-3/8" (289 mm x 264 mm)

Rim to water surface: 6" (152 mm)

Rough-in: 10" or 12" (254 or 305 mm)

Seat-mounting holes: 5-1/2" (140 mm)

Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing pressure: 25 psi (172.4 kPa)
Min flow rate: 25 gpm (94.6 lpm)

Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flushometer requirements: for 12"(305 mm) rough-in, sweat extension nipple is required.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

