

Highline® Dual Flush Toilet K-45979

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers a chair-height seat that makes sitting down and standing up easier for most adults.
- Left-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf).
- 2-1/8-inch glazed trapway.
- Complete Solution® toilets provide everything you need in one box, including bowl, tank, seat, wax ring, and floor hardware.
- Available exclusively at The Home Depot.
- Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- Supply line not included.
- Standard 12-inch rough-in.
- Three-bolt installation.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets
- Eligible for consumer rebates in some municipalities.

Recommended Accessories

4731 7637

Components

Additional included component/s: Bowl, Tank, Tank cover, Trip lever, Toilet seat, Wax ring and hardware installation kit, and Bolt cap accessory pack.



ADA CSA B651 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


0 White





Highline®

Dual Flush Toilet **K-45979**

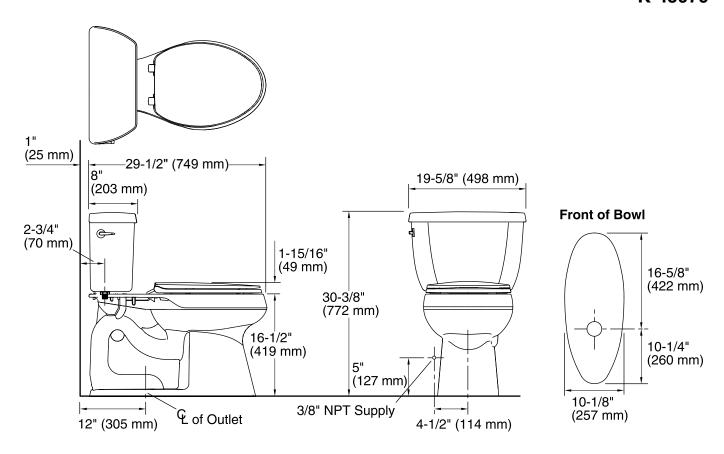

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece
Bowl shape: Elongated front
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water surface: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

Install this product according to the installation quide.

Will comply with ADA when installed per Section 607 Bathtubs of the 2010 ADA Standards for Accessible Design, Section 604 Water Closets. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with CSA B651 when installed per Clause 4.3.6 of the standard.

Will comply with OBC when installed per Clause 3.8.3.8 and 3.8.3.9.

For back-to-back toilet installations, the toilet shall be connected to the vertical stack using one of the three following fitting double fixture fitting, double combination wye and 1/8 bends or double wye and 1/8 bends.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

