

Features

- Integral flange.
- Left drain.
- Integral apron.
- Integral lumbar support.
- 60" (1524 mm) x 32" (813 mm) x 16-1/4" (413 mm)

Material

- Cast iron with Safeguard® finish.

Installation

- Alcove

Recommended Accessories

K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-7160-AF Clearflo Bath Drain
K-7213 27" Cable Bath Drain
K-7214 27" Cable Bath Drain
K-7259 Clearflo Bath Drain
K-702200-G54 Frameless Sliding Bath Door
K-702200-G73 Frameless Sliding Bath Door
K-702200-L Frameless Sliding Bath Door
K-702205-L Frameless Sliding Bath Door
K-706000-D3 Frameless Sliding Bath Door
K-706000-L Frameless Sliding Bath Door
K-706003-L Frameless Sliding Bath Door
K-706004-D3 Frameless Sliding Bath Door
K-706004-L Frameless Sliding Bath Door
K-706007-L Frameless Sliding Bath Door
7160-TF



ADA

CSA B651

OBC

Codes/Standards

ASME A112.19.1/CSA B45.2
ASTM F462
ASTM F462
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Lifetime Limited Warranty for Cast Iron Components


See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color Code Description

	0	White
	96	Biscuit
	47	Almond

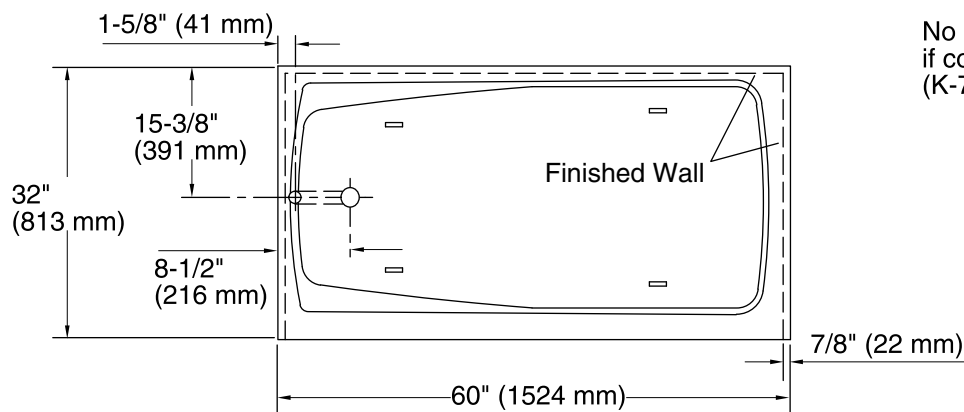

No change in measurements
if connected with drain illustrated.
(K-7160-TF)

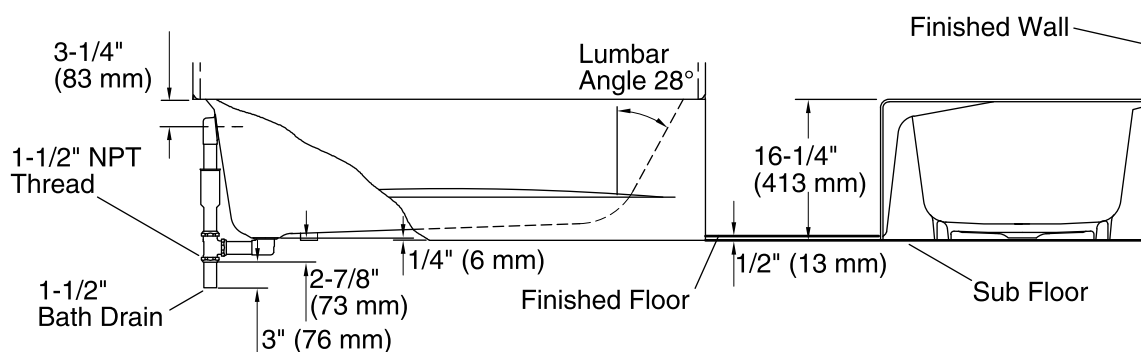

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Left

Basin area, bottom: 46" x 20" (1168 mm x 508 mm)

Basin area, top: 54" x 24" (1372 mm x 610 mm)

Weight: 351 lbs (159.2 kg)

Minimum floor load: 56 lbs/ft² (273.4 kg/m²)

Water depth: 10-7/8" (276 mm)

Water capacity: 45 gal (170.3 L)

Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Measure your actual product for roughing-in details.

Hot water supply should be 70% of capacity or greater. Installations will vary.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.