

### Features

- Integral flange.
- Left drain.
- Integral lumbar support.
- Integral apron.
- 60" (1524 mm) x 32" (813 mm) x 16-1/4" (413 mm)

### Material

- Cast iron with Safeguard® finish.

### Installation

- Alcove

### Recommended Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-7160-AF Clearflo Bath Drain  
K-7213 27" Cable Bath Drain  
K-7214 27" Cable Bath Drain  
K-7259 Clearflo Bath Drain  
K-702200-G54 Frameless Sliding Bath Door  
K-702200-G73 Frameless Sliding Bath Door  
K-702200-L Frameless Sliding Bath Door  
K-702205-L Frameless Sliding Bath Door  
K-706000-D3 Frameless Sliding Bath Door  
K-706000-L Frameless Sliding Bath Door  
K-706003-L Frameless Sliding Bath Door  
K-706004-D3 Frameless Sliding Bath Door  
K-706004-L Frameless Sliding Bath Door  
K-706007-L Frameless Sliding Bath Door



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.19.1/CSA B45.2  
ASTM F462  
ASTM F462  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® Lifetime Limited Warranty for Cast Iron Components


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

|                                                                                      |    |         |
|--------------------------------------------------------------------------------------|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |
|  | 47 | Almond  |

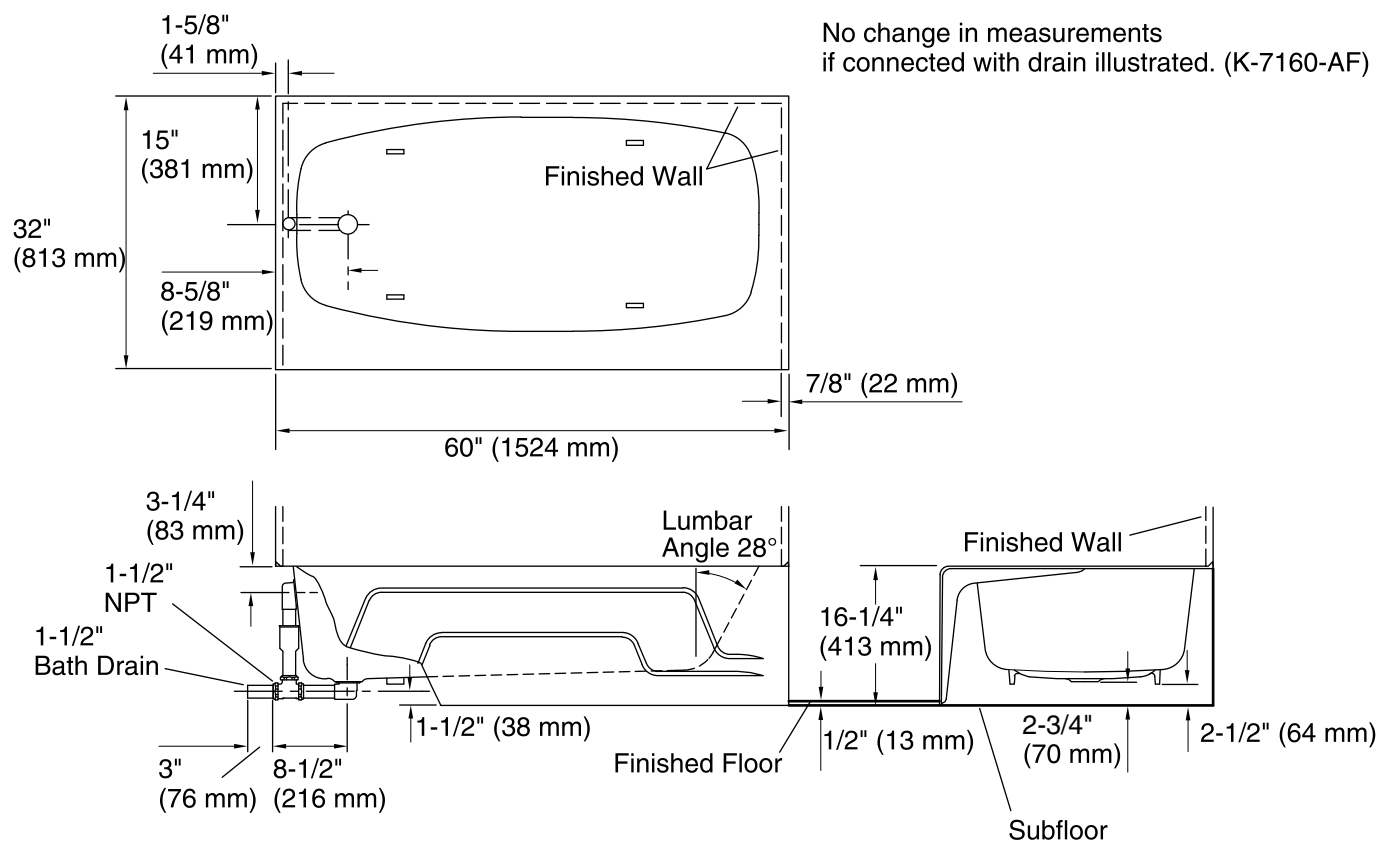

### Technical Information

All product dimensions are nominal.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Installation:          | 3-Wall Alcove                                     |
| Drain location:        | Left                                              |
| Basin area, bottom:    | 41" x 22" (1041 mm x 559 mm)                      |
| Basin area, top:       | 54" x 25" (1372 mm x 635 mm)                      |
| Weight:                | 345 lbs (156.5 kg)                                |
| Minimum floor load:    | 50 lbs/ft <sup>2</sup> (244.1 kg/m <sup>2</sup> ) |
| Water depth:           | 8-5/8" (219 mm)                                   |
| Water capacity:        | 35 gal (132.5 L)                                  |
| Minimum flat for door: | 0" (0 mm)                                         |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

**NOTICE:** By design, the apron is not perpendicular. The bottom edge of the apron angles out approximately 3/4" (19 mm) from the top of the rim.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.