



Underscore® 5' BubbleMassage™ Whirlpool Bath K-5714-XH2G



Features

- Dual lumbar supports two-person bathing by offering comfort at both ends
- Center drain.
- Slotted overflow allows for deep soaking. Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- 8 hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in heater.
- Automatic purge cycles remove residual water from air channels after use..

Material

- Acrylic

Hydrotherapy

- Pump with air switch for whirlpool.
- 118-122 BubbleMassage™ airjets. 18 levels of massage intensity.

Installation


- Drop-in

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain
or
K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-24916 Wireless Music Kit
K-814 Under-mount Installation Kit

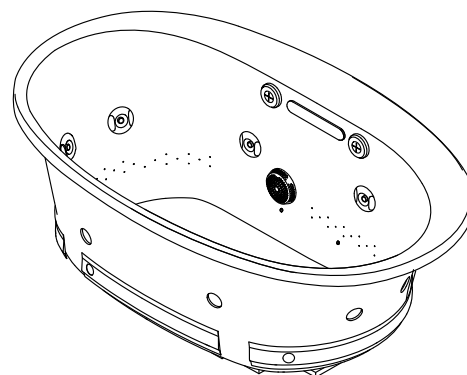

Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold
CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|---------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |
| | NY | Dune |
| | 95 | Ice™ Grey |
| | G9 | Sandbar |
| | 33 | Mexican Sand™ |
| | K4 | Cashmere |
| | 58 | Thunder™ Grey |
| | 7 | Black Black™ |

USA/Canada: 1-800-4KOHLER (1-800-456-4537)



Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 06:09


THE BOLD LOOK
OF **KOHLER**®

No change in measurements if connected with drain illustrated. (K-7272)

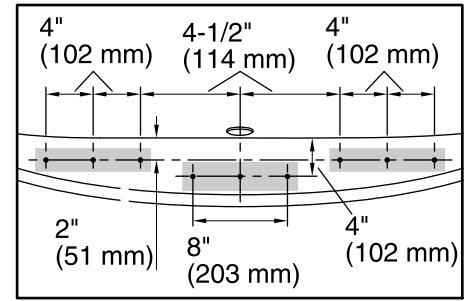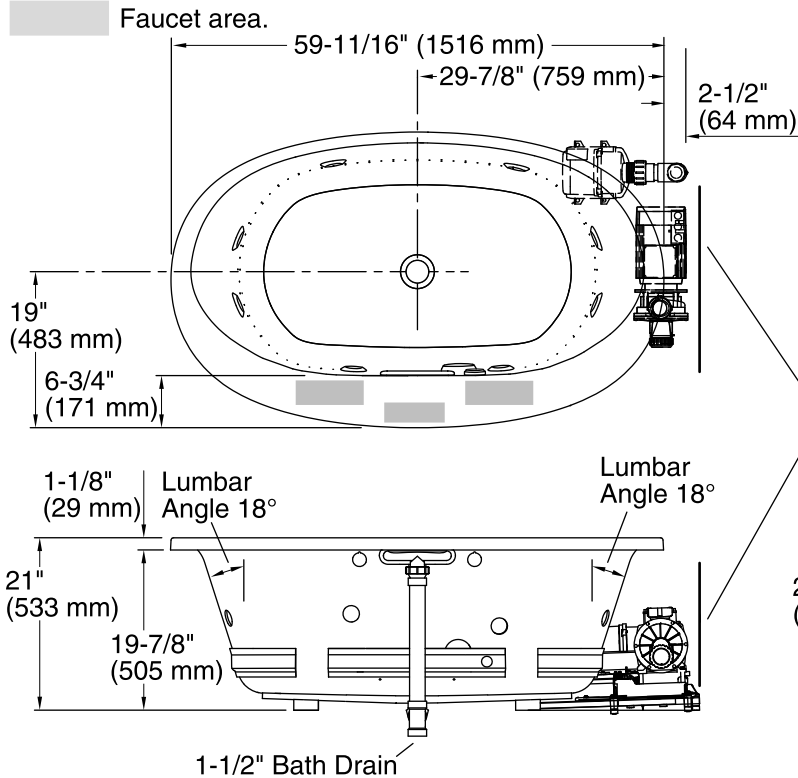

**Faucet Hole Locations
(For KOHLER® Brand Only)**

Blower Motor Access
30" (762 mm) W x 15" (381 mm) H

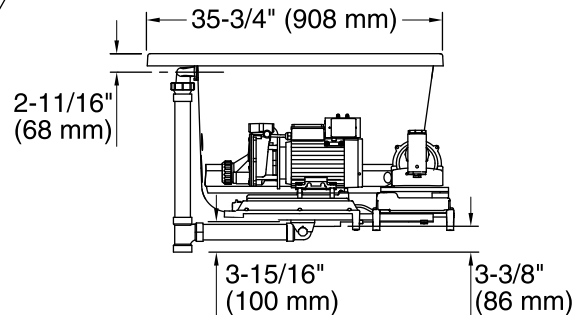

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower, Pump: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

| | |
|------------------------------|--|
| Installation: | Drop-in, Under-mount |
| Drain location: | Center |
| Basin area, bottom: | 43" x 25-5/8" (1093 mm x 651 mm) |
| Basin area, top: | 55-9/16" x 28-3/8" (1411 mm x 720 mm) |
| Weight: | 160 lbs (72.6 kg) |
| Minimum floor load: | 53.9 lbs/ft² (263.2 kg/m²) |
| Water depth: | 16-5/16" (415 mm) |
| Water capacity: | 72.017 gal (272.6 L) |
| Template: | Drop-in, 1268438-7, required, included |
| Electrical component rating: | Blower: 240 V, 3 A, 50/60 Hz, 300 W Pump: 240 V, 11 A, 50/60 Hz, 1500 W |
| Minimum flat for door: | 0" (0 mm) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

The pump base extends beyond the edge of the rim. Modify the framing as needed.

IMPORTANT! Dry fit the drain assembly prior to installing the bath. The bath cannot be installed with all drain components attached.