



### Features

- Dual lumbar supports two-person bathing by offering comfort at both ends.
- Center drain.
- Slotted overflow allows for deep soaking. Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- VibrAcoustic® calms and soothes with sound vibration technology.
- Zones of Control™ feature allows you to target massage to back, midsection, or feet.
- Functions as a hydrotherapy bath when full of water and a stereo system when empty.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Plug in your smart phone, tablet, or MP3 player via auxiliary-in cable. Add your own receiver to stream wirelessly via Bluetooth®.
- The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such CSA B45.5/IAPMO Z124 ASTM E162 marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

### Material

- Acrylic.

### Hydrotherapy

- 118-122 BubbleMassage™ airjets. 18 levels of massage intensity.
- VibrAcoustic® technology emits sound waves and offers a surround sound experience.

### Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Accessories

K-883 Under-mount Install Kit



### Codes/Standards


ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
Greenguard UL 2818 - Gold  
CARB P2

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

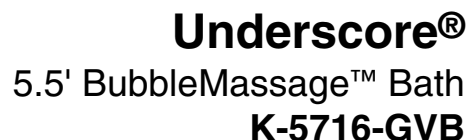


**Top View Dimensions:**


- Faucet area
- Overall width: 66" (1676 mm)
- Inner width: 33" (838 mm)
- Overall height: 4" (102 mm)
- Seat height: 19" (483 mm)
- Seat thickness: 6-3/4" (171 mm)

**Side View Dimensions:**

- Backrest height: 1-1/2" (38 mm)
- Backrest depth: 22" (559 mm)
- Seat height: 20-1/2" (521 mm)
- Backrest width: \*24" (610 mm)
- Backrest angle: Lumbar Angle 30°
- Seat width: \*10" (254 mm)
- Seat angle: Lumbar Angle 30°
- Blow 34" (x 15")
- 1-1/2" Bath Drain

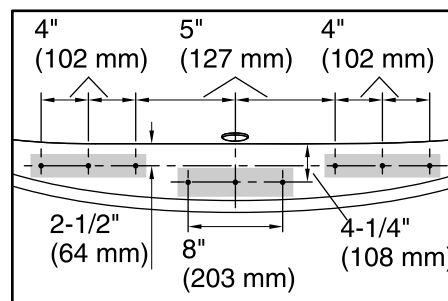


**Faucet Hole Location  
(For KOHLER® Brand Only)**

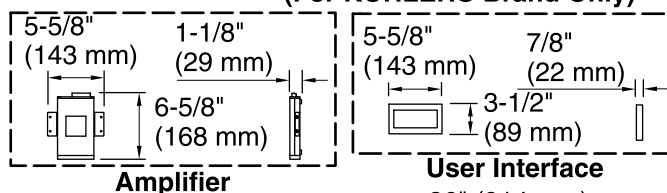

## Amplifier

## User Interface

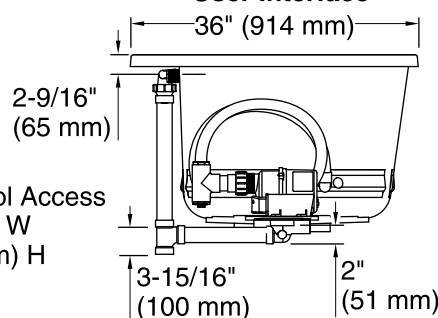

Blower/Control Access  
34" (864 mm) W  
x 15" (381 mm) H

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Installation:	Drop-in, Under-mount
Drain location:	Center
Basin area, bottom:	47" x 26-1/4" (1193 mm x 666 mm)
Basin area, top:	61-3/16" x 28-3/8" (1554 mm x 721 mm)
Weight:	120 lbs (54.4 kg)
Minimum floor load:	53.6 lbs/ft <sup>2</sup> (261.7 kg/m <sup>2</sup> )
Water depth:	17-9/16" (446 mm)
Water capacity:	85.5 gal (323.7 L)
Template:	Drop-in, 1268439-7, required, included
Electrical component rating:	Blower: 120 V, 10 A, 60 Hz, 300 W Amplifier: 120 V, 1.2 A, 50/60 Hz
Minimum flat for door:	0" (0 mm)

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

Control amplifier fits 16" (406 mm) center studs.  
25' (7.6 m) cables are included.