



Underscore® 5.5' Bubblemassage™ Whirlpool Bath K-5716-XH2G



Features

- Dual lumbar supports two-person bathing by offering comfort at both ends.
- Center drain.
- Slotted overflow allows for deep soaking.
- Integral lumbar support and armrests for comfort.
- 66" (1676 mm) x 36" (914 mm) x 22" (559 mm)

Material

- Acrylic

Hydrotherapy

- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Variable-speed blower for adjusting hydromassage intensity.
- Zones of Control™ feature allows you to target airjet massage to back, midsection, or feet.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in 1500 W heater.
- Lighted keypad control.
- Automatic purge cycles remove residual water from air channels after use.
- 118-122 BubbleMassage™ airjets.
- Pump with air switch for whirlpool.

Installation

- Drop-in or under-mount.

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-883 Under-mount Install Kit



Codes/Standards











ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold
CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.



12-20-2016 06:10

THE BOLD LOOK
OF **KOHLER**®





Underscore® 5.5' Bubblemassage™ Whirlpool Bath K-5716-XH2G

No change in measurements if connected with drain illustrated. (K-7272)

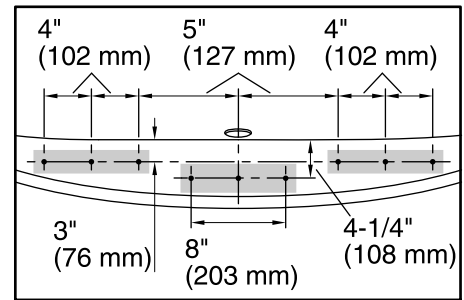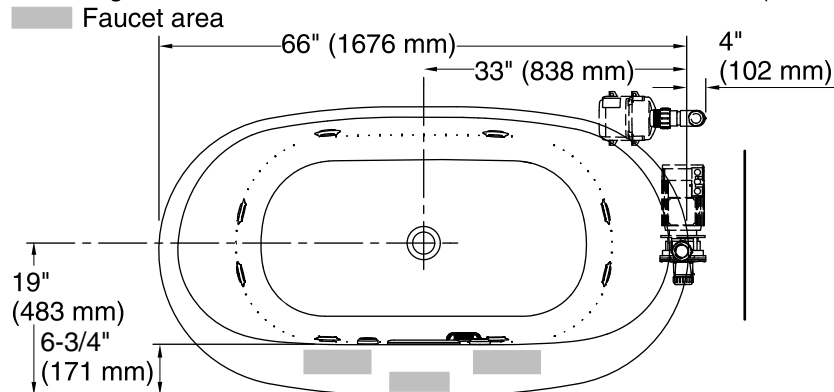

**Faucet Hole Locations
(For KOHLER® Brand Only)**

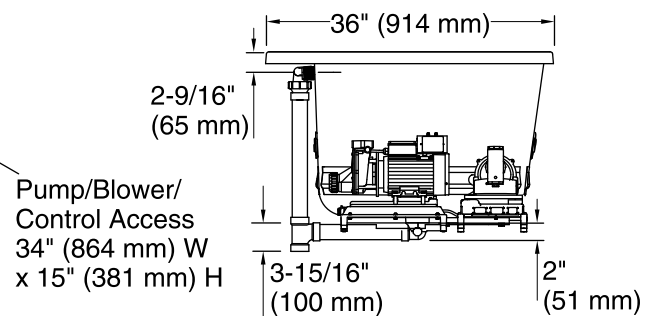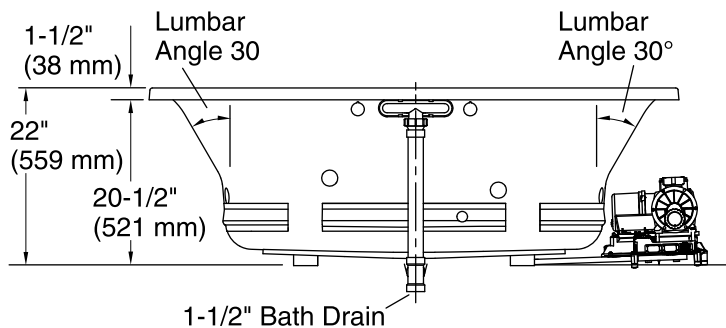

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Blower, 240 V, 20 A, 50/60 Hz
Heater:

Technical Information

All product dimensions are nominal.

Installation: Drop-in, Under-mount
Drain location: Center
Basin area, bottom: 47" x 26-1/4" (1193 mm x 666 mm)
Basin area, top: 61-3/16" x 28-3/8" (1554 mm x 721 mm)
Weight: 165 lbs (74.8 kg)
Minimum floor load: 56.3 lbs/ft² (274.9 kg/m²)
Water depth: 17-9/16" (446 mm)
Water capacity: 85.5 gal (323.7 L)
Template: Drop-in, 1268439-7, required, included
Electrical component rating: Pump: 240 V, 11 A, 50/60 Hz
Blower: 240 V, 5 A, 50/60 Hz
Heater: 220-240 V, 50/60 Hz, 1500 W
Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

The pump base extends beyond the edge of the rim. Modify the framing as needed.