



Underscore® 5' BubbleMassage™ Whirlpool Bath K-5718-XH2G



Features

- Center drain.
- Slotted overflow allows for deep soaking.
- Dual lumbar supports two-person bathing by offering comfort at both ends
- 72" (1829 mm) x 42" (1067 mm) x 22" (559 mm)

Material

- Acrylic

Hydrotherapy

- Pump with air switch for whirlpool.
- Single-speed whirlpool offers 8 fully adjustable hydro-massage jets for water flow and direction.
- 118-122 BubbleMassage™ airjets.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Variable-speed pump for adjusting hydromassage intensity.
- Automatic purge cycles remove residual water from air channels after use.
- Built-in 1500 W heater.

Installation

- Drop-in or under-mount.

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-24916 Wireless Music Kit

K-886 Under-mount Install Kit



Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

CSA C22.2 No. 218.2

Greenguard UL 2818 - Gold











CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 06:11

THE BOLD LOOK
OF **KOHLER**®

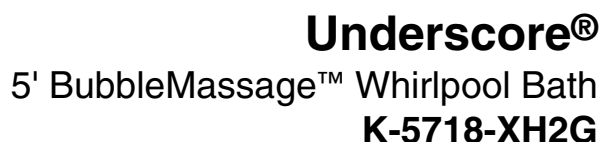

Top View Dimensions:

- Faucet area
- 72" (1829 mm)
- 36" (914 mm)
- 22" (559 mm)
- 6-7/8" (175 mm)
- *24" (610 mm)


Side View Dimensions:

- 1-1/2" (38 mm)
- 23" (584 mm)
- 21-1/2" (546 mm)
- Lumbar Angle 30°
- *10" (254 mm)
- Lumbar Angle 36°
- 1-1/2" Bath Drain

4" (102 mm) 5" (127 mm) 4" (102 mm)


2-1/2" (64 mm) 8" (203 mm) 4-1/4" (108 mm)

Faucet Hole Locations (For KOHLER® Brand Only)

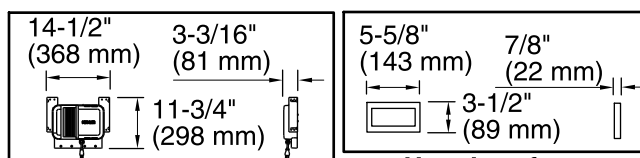

Control Amplifier

User Interface

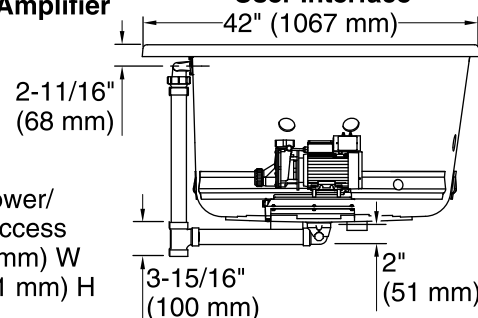

Pump/Blower/
Control Access
34" (864 mm) W
x 15" (381 mm) H

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Installation:	Drop-in, Under-mount
Drain location:	Center
Basin area, bottom:	46-5/16" x 31-3/16" (1177 mm x 792 mm)
Basin area, top:	63-7/16" x 34-1/4" (1611 mm x 869 mm)
Weight:	180 lbs (81.6 kg)
Minimum floor load:	55.8 lbs/ft ² (272.4 kg/m ²)
Water depth:	18-5/8" (472 mm)
Water capacity:	112.2 gal (424.7 L)
Template:	Drop-in, 1268440-7, required, included
Electrical component rating:	Pump: 240 V, 11 A, 50/60 Hz, 1500 W Blower: 240 V, 5 A, 50/60 Hz, 300 W Heater: 240 V, 50/60 Hz, 1500 W
Minimum flat for door:	0" (0 mm)

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Measure your actual product for roughing-in details.

Hot water supply should be 70% of capacity or greater. Installations will vary.