



Fluence®

Frameless Pivot Shower Door

K-702416-L

Features

- Frameless design highlights showering area.
- Two-roller compression latches allow for smooth secure door closure.
- A concealed hinge provides smooth, stable operation.
- No top header eliminates clearance issues.
- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.
- Elegant inside and outside brass pull handles complete the look of this door.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.

Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

Components

Additional included component/s: Hardware kit.



Codes/Standards

CPSC 16CFR 1201
ANSI Z97.1 (Tempered Glass)

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|





| | |
|----|---------------|
| SH | Bright Silver |
|----|---------------|

Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|---|---------------|
| L | Crystal Clear |
|---|---------------|

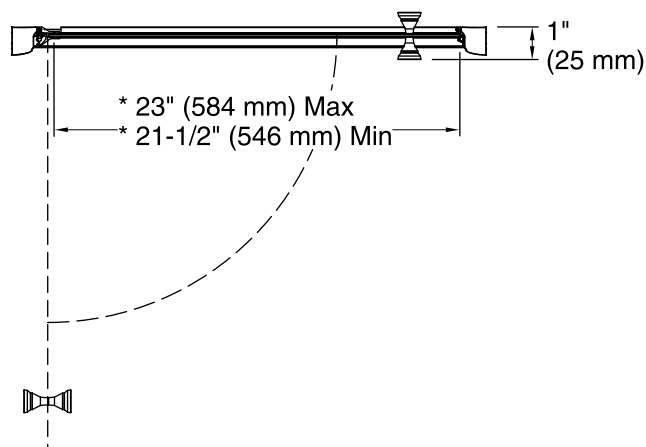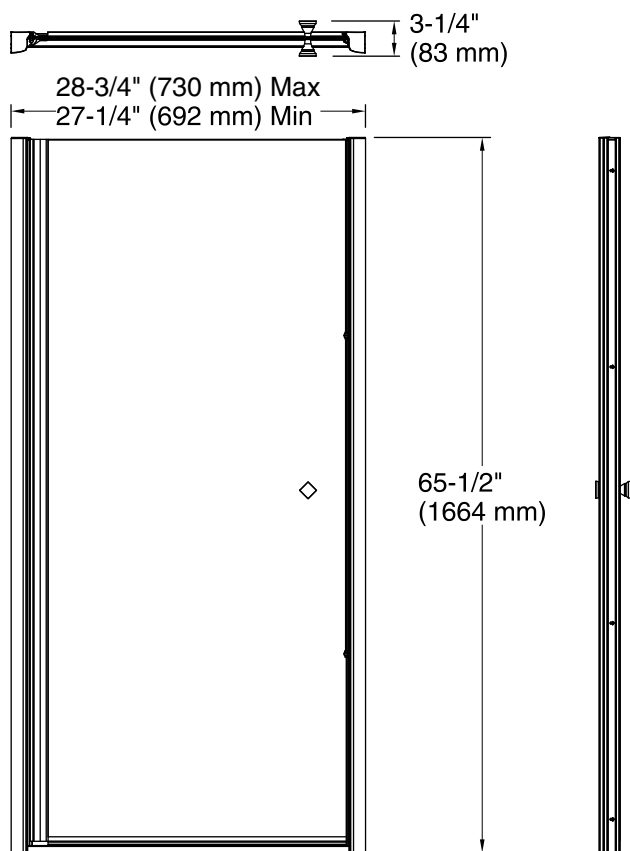

* Walk-through

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Pivot

Opening Width - Min: 27-1/4" (692 mm)

Opening Width - Max: 28-3/4" (730 mm)

Walk-through - Min: 21-1/4" (540 mm)

Walk-through - Max: 23" (584 mm)

Glass thickness: 1/4" (6 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 66" (1676 mm) to allow for installation clearance.