

# **Levity®**

# Frameless Sliding Shower Door K-706011-L

#### **Features**

- Frameless design highlights showering area.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability.
- Frameless, 3/8" (10 mm) thick frosted Crystal Clear glass.
- Door tracking system features a hidden, cushioned, center guide for smooth, quiet sliding action.
- Smooth, easy-to-clean wall jambs.
- Contemporary vertical blade handles complete the look of this
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.

#### Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

#### Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

## Components

Additional included component/s: Hardware kit.



# Codes/Standards

CPSC 16CFR 1201 ANSI Z97.1 (Tempered Glass)

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description             |
|-------|------|-------------------------|
| 11    | SHP  | Bright Polished Silver  |
|       | NX   | Brushed Nickel          |
|       | ABV  | Anodized Brushed Bronze |

## **Available Glass Options Code Description**


Crystal Clear





# Levity®

# Frameless Sliding Shower Door K-706011-L

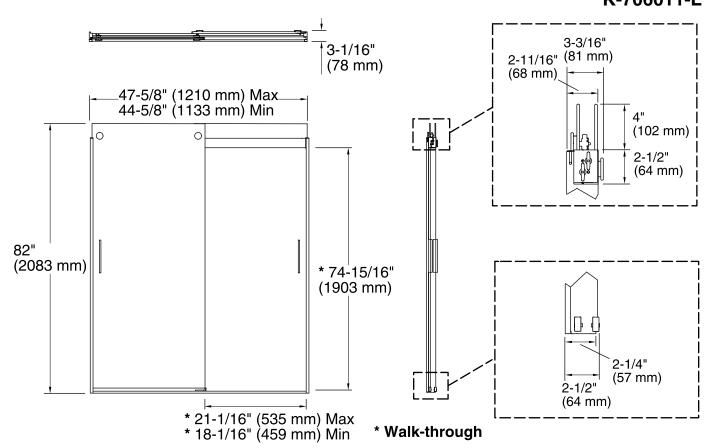

### **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass
Opening Width - Min: 44-5/8" (1133 mm)
Opening Width - Max: 47-5/8" (1210 mm)
Walk-through - Min: 18-1/16" (459 mm)
Walk-through - Max: 21-1/16" (535 mm)
Glass thickness: 3/8" (10 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 84-1/2" (2146 mm) to allow for installation clearance.

