Features
- Frameless design highlights showering area.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability.
- Frameless, 1/4" (6 mm) thick frosted Crystal Clear glass.
- Door tracking system features a hidden, cushioned, center guide for smooth, quiet sliding action.
- Smooth, easy-to-clean wall jambs.
- Gently curved towel bars inside and out complete the look of this door.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.

Material
- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation
- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

Components
Additional included component/s: Hardware kit.

Codes/Standards
CPSC 16CFR 1201
ANSI Z97.1 (Tempered Glass)

KOHLER® One-Year Limited Warranty
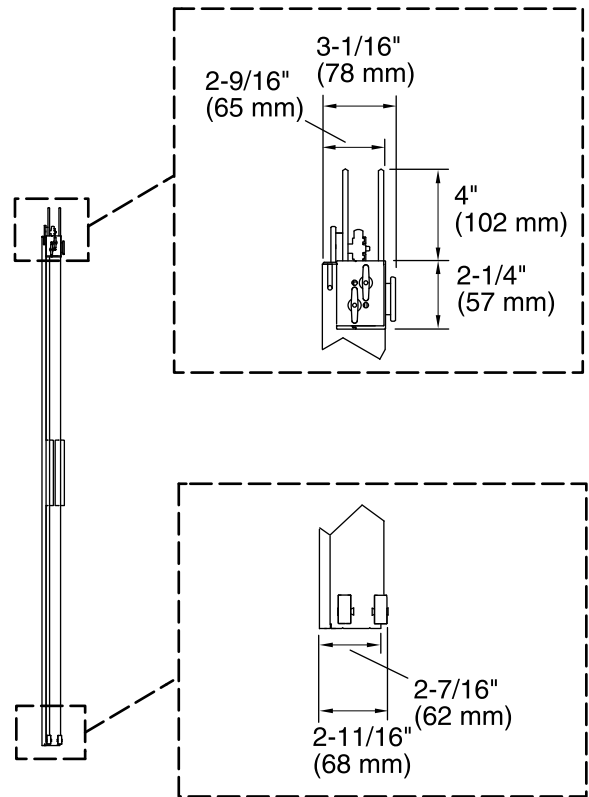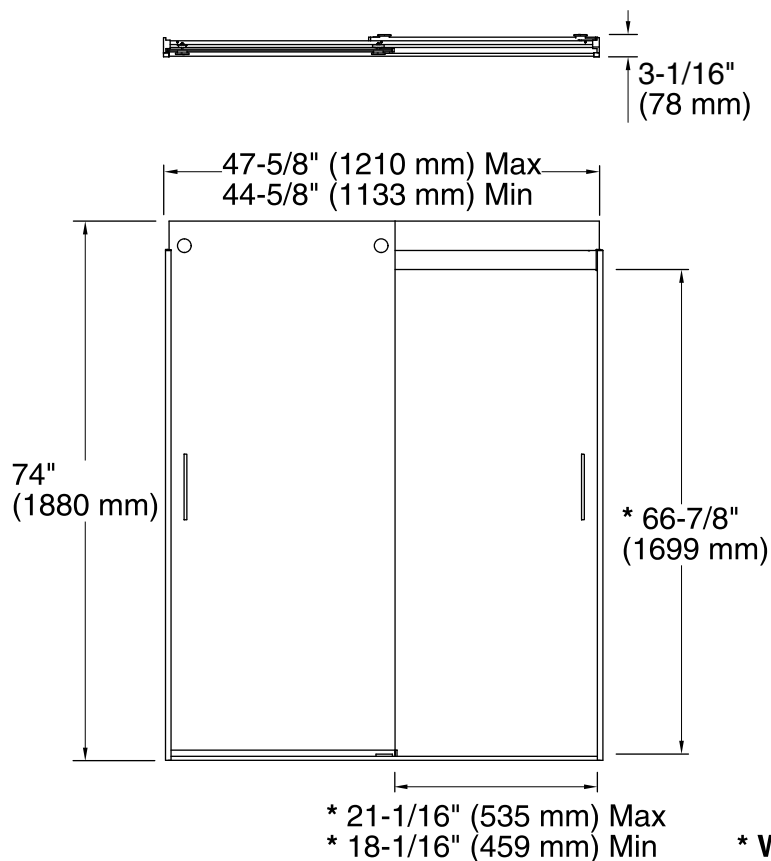See website for detailed warranty information.

Available Color/Finishes
Color tiles intended for reference only.

Color	Code	Description
	SH	Bright Silver
	MX	Matte Nickel
	ABV	Anodized Brushed Bronze

Available Glass Options

Code	Description
L	Crystal Clear

USA/Canada: 1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
12-20-2016 06:42

THE BOLD LOOK OF KOHLER.

3-1/16"
(78 mm)

47-5/8" (1210 mm) Max
44-5/8" (1133 mm) Min

74"
(1880 mm)

* 66-7/8"
(1699 mm)

* 21-1/16" (535 mm) Max
* 18-1/16" (459 mm) Min

3-1/16"
(78 mm)

2-9/16"
(65 mm)

4"
(102 mm)

2-1/4"
(57 mm)

2-7/16"
(62 mm)

2-11/16"
(68 mm)

* **Walk-through**

Technical Information
All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Sliding/Bypass
Opening Width - Min:	44-5/8" (1133 mm)
Opening Width - Max:	47-5/8" (1210 mm)
Walk-through - Min:	18-1/16" (459 mm)
Walk-through - Max:	21-1/16" (535 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes
Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
12-20-2016 06:42

THE BOLD LOOK OF KOHLER®