



Torsion™

36"x36" Pivot w/ Return Door

K-706070-L

Features

- Frameless, 5/16-inch-thick (8mm) Crystal Clear tempered glass.
- Geometric handle on both sides of the glass has a solid, heavy feel.
- Door is reversible for right- or left-hand installation.
- Ultra-low threshold for easy entry and exit.
- CleanCoat® glass treatment repels water for improved ease of cleaning.
- Flush-fitting bonded hinges create smooth surface for quick cleaning.
- No exposed screws for sleek, contemporary look.
- Out-of-Plumb adjustability for simple installation.

Material

- Anodized aluminum hardware prevents rusting or corrosion.

Installation

- Pivot shower door.
- Pre-assembled frame requires no cutting during installation.
- 3/4-inch width adjustability on each wall jamb (offering 1 - 1/2 inch total adjustability).
- Additionally, filler sections (sold separately) can be used to extend the width of a door (1296808) or return panel (1296809) by up to 3/8-inch.
- Adjustable ball catch ensures reliable operation.

Components

Product includes:

K-706026-L 36" Return Panel

K-706077-L 36" Pivot Door

Additional included component/s: Hardware Kit.



Codes/Standards

ANSI Z97.1 (Tempered Glass)

CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|




| | |
|-----|------------------------|
| SHP | Bright Polished Silver |
|-----|------------------------|

Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|---|---------------|
| L | Crystal Clear |
|---|---------------|

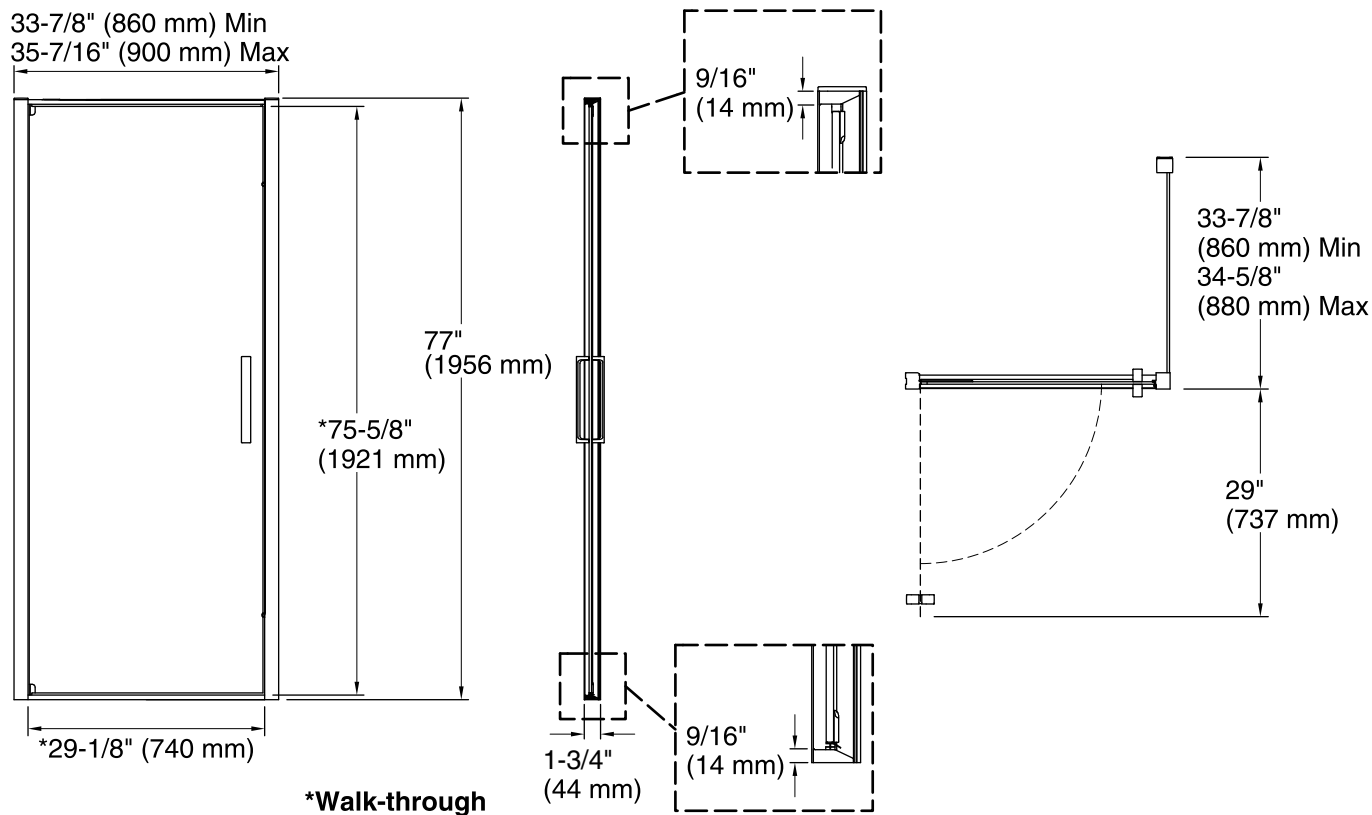

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 33-7/8" (860 mm)

Opening Width - Max: 35-7/16" (900 mm)

Walk-through - Min: 29-1/8" (740 mm)

Walk-through - Max: 29-1/8" (740 mm)

Glass thickness: 5/16" (8 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.