

# Revel™

# Frameless Pivot Shower Door K-707556-D3

#### **Features**

- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Frameless, 5/16" (8 mm) thick Frosted tempered glass door.
- No top header eliminates clearance issues.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Self-closing mechanism offers superior performance and security against water leakage.

#### Material

Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

Out-of-plumb adjustability allows for simpler installation.

## Components

Additional included component/s: Hardware Kit.



# Codes/Standards

ASTM C1036 ASTM C1048 ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201

### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
1	BNK	Anodized Brushed Nickel

# Available Glass Options Code Description


Frosted





# **Revel™** Frameless Pivot Shower Door

# Frameless Pivot Shower Door **K-707556-D3**

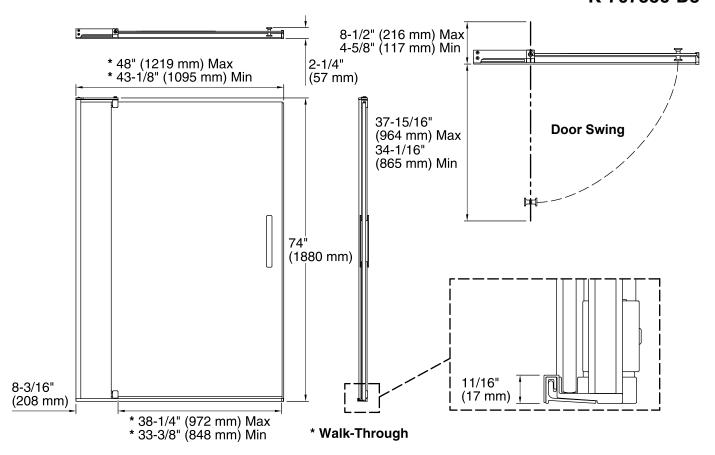

#### **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Pivot

Opening Width - Min: 43-1/8" (1096 mm)
Opening Width - Max: 48" (1219 mm)
Walk-through - Min: 33-3/8" (847 mm)
Walk-through - Max: 38-1/4" (971 mm)
Glass thickness: 5/16" (8 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 78" (2032 mm) to allow clearance for installation.

