



## Iron Works®

### 5.5' Whirlpool Bath

### K-712-H2

#### Features

- End drain.
- Integral lumbar support.
- 66" (1676 mm) x 36" (914 mm) x 19-1/4" (489 mm)

#### Material

- Cast iron with Safeguard® finish.

#### Hydrotherapy

- Six fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.
- Remote control.

#### Installation

- Drop-in

#### Required Accessories

K-9696 Whirlpool 6-Jet Trim Kit

#### Recommended Accessories

K-1172 Adjustable Feet  
K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-1703 Whirlpool Remote Control  
K-7259 Clearflo Bath Drain  
K-9497 2-1/2" Keypad Trim



#### Codes/Standards

ASME A112.19.1/CSA B45.2  
ASME A112.19.7/CSA B45.10  
ASTM F462  
ASTM F462  
UL 1795  
CSA C22.2 No. 218.2  
CARB P2






#### KOHLER® Lifetime Limited Warranty for Cast Iron Components

See website for detailed warranty information.


#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

No change in measurements if connected with drain illustrated. (K-7103)

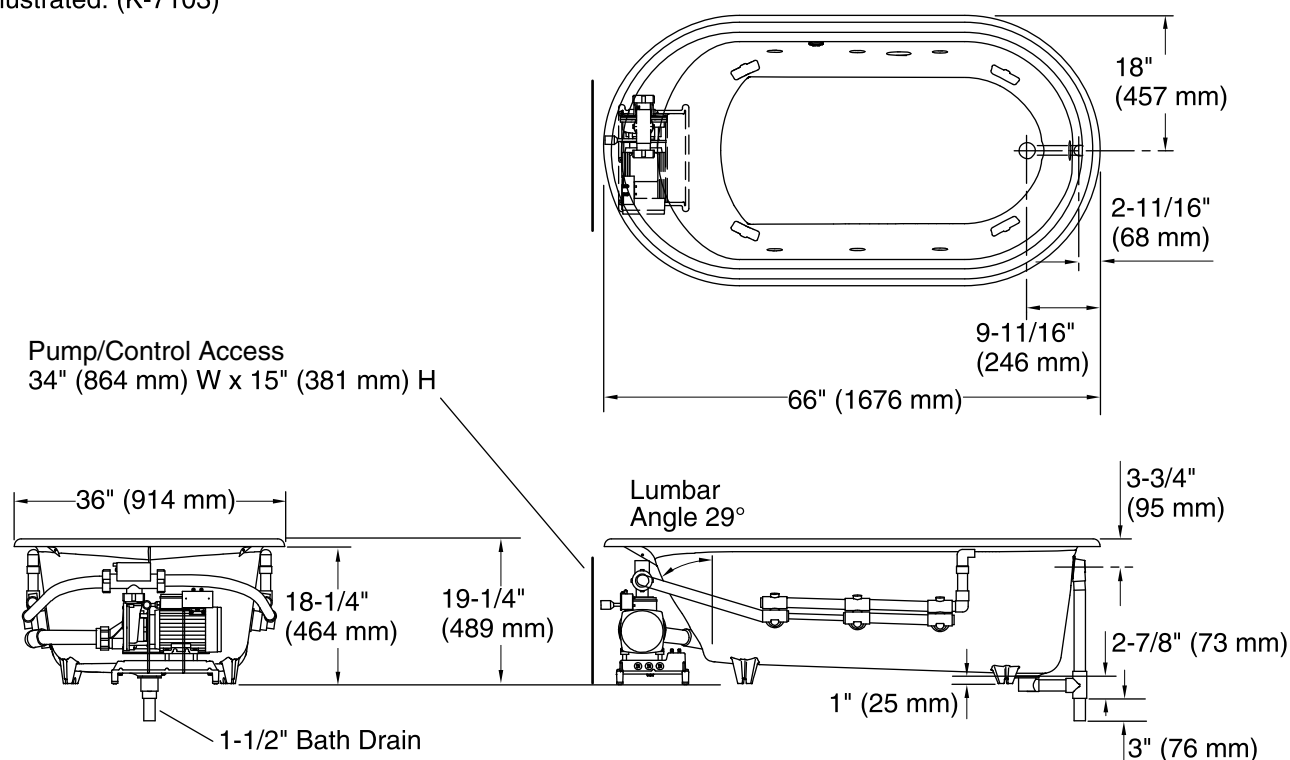

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

### Technical Information

All product dimensions are nominal.

Installation: Drop-in  
Drain location: End  
Basin area, bottom: 47-1/2" x 25" (1207 mm x 635 mm)  
Basin area, top: 55" x 29" (1397 mm x 737 mm)  
Weight: 500 lbs (226.8 kg)  
Minimum floor load: 65 lbs/ft² (317.4 kg/m²)  
Water depth: 12-5/8" (321 mm)  
Water capacity: 64 gal (242.3 L)  
Template: Drop-in, 88051-7, required, included  
Electrical component rating: Pump: 240 V, 11 A  
Heater: 240 V, 6 A, 1500 W  
Pump speed: Variable  
Minimum flat for door: 0" (0 mm)

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.