

Features

- Brass construction.
- Brass valve bodies.
- Valvet® valves.
- Wristblade lever handles.
- For 8" (203 mm) centers.
- Adjustable flanges.
- Loose key stops.
- 1/2" NPT inside threaded inlets.
- 3-5/8" (92 mm) low gooseneck spout reach.
- Stationary spout.
- 7-5/8" (194 mm) wall-to-spout outlet.
- Less drain.
- 2.5 gal/min (9.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

Optional Accessories

1160594 Large Spray Aerator 0.35 gpm (1.3 l/min)



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

Color Code Description



CP Polished Chrome

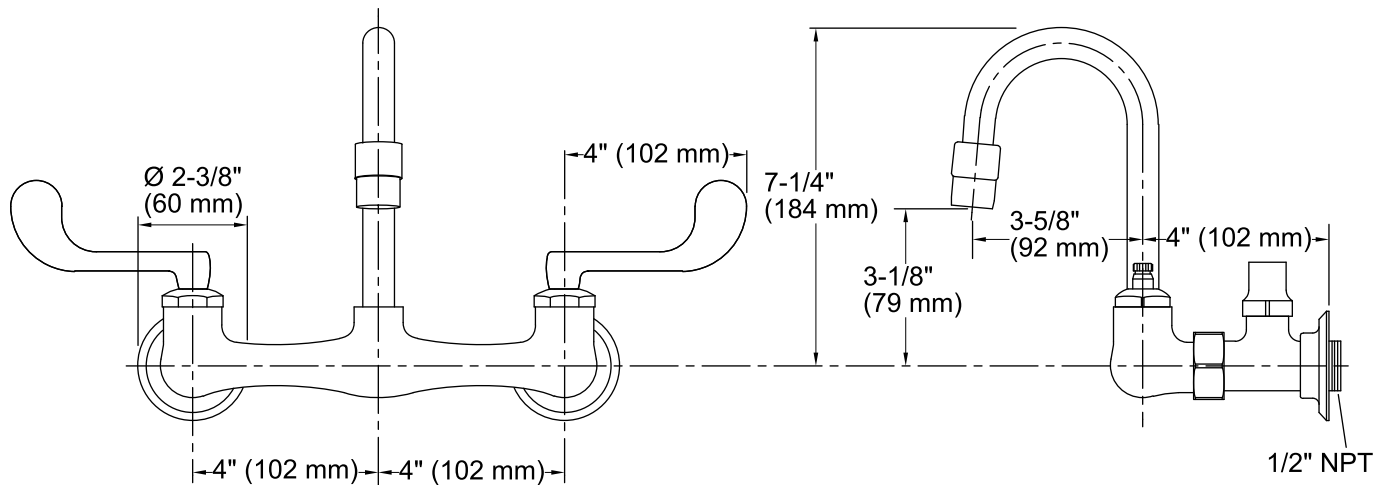

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 3-5/8" (92 mm)

Handle clearance: 4" (102 mm)

Faucet:

Flow rate: 2.5 gal/min (9.5 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.