

## Features

- Two quarter-turn washerless ceramic disc valves.
- Ceramic disc valves resist deterioration and mineral buildup, resulting in long-lasting, reliable performance.
- High-arch gooseneck swing spout and 360-degree spout rotation offer superior clearance for filling pots and cleaning.
- 10-1/4" (260 mm) gooseneck swing spout reach.
- Two lever handles offer separate control of hot and cold water.
- Coordinates with other products in the HiRise collection.
- 1.8 gpm (gallons per minute) maximum flow rate at 60 psi.

## Material

- Stainless-steel construction.
- KOHLER finishes resist corrosion and tarnishing.

## Installation

- Two-hole installation for 8" (203 mm) centers.



**ADA** **CSA B651**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

## KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

### Color Code Description

	S	Polished Stainless
	BS	Brushed Stainless

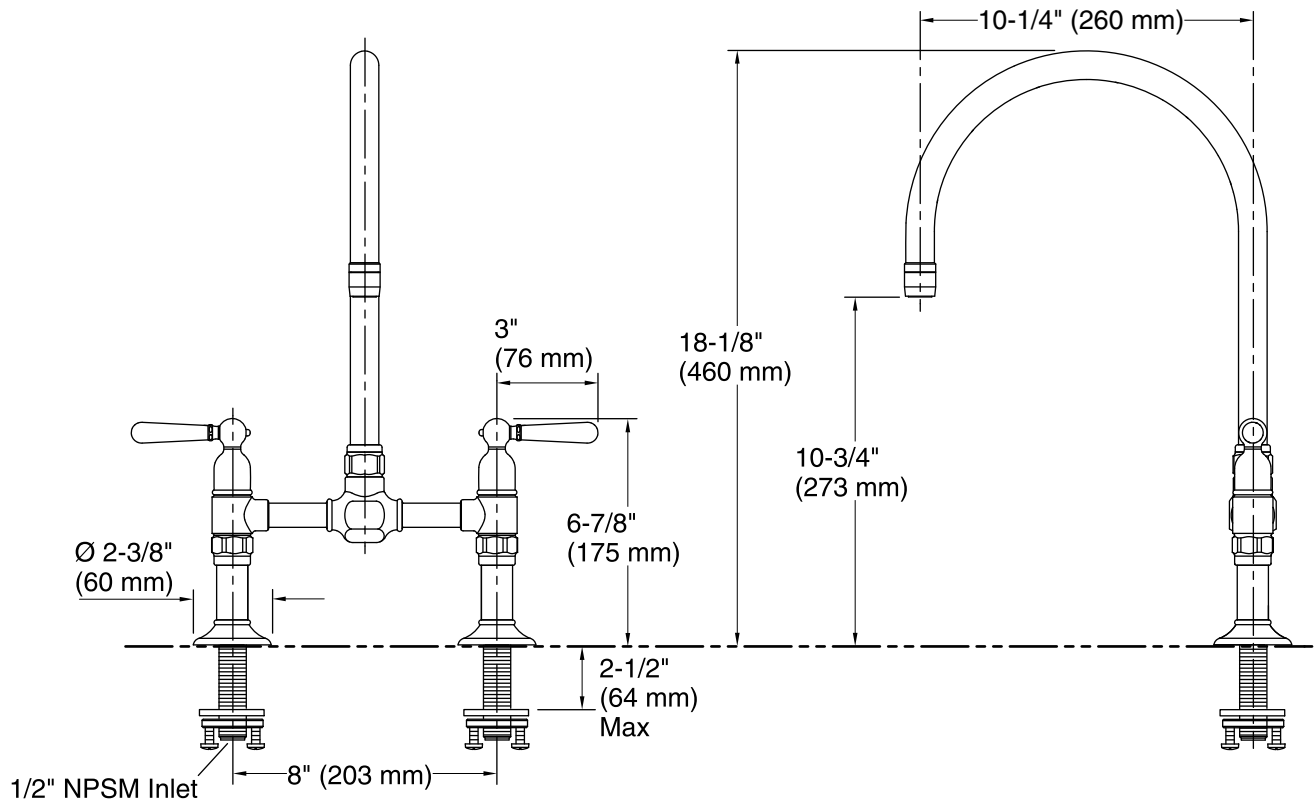

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)  
Pressure: 60 psi (4.1 bar)

## Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.