

### Features

- Engineered for optimal performance with KOHLER toilets.
- Fixture-mount design.
- Self-cleaning brass piston prevent clogging and reduces maintenance.

### Material

- Durable brass construction.
- Chloramine resistance on all rubber components exposed to waterway.

### Technology

- Non-hold open piston technology for accurate activation.

### Installation

- Intended for toilet installations with 1-1/2" top spud coupling connection.
- Includes vacuum breaker and control stop.



ADA

CSA B651

OBC

### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

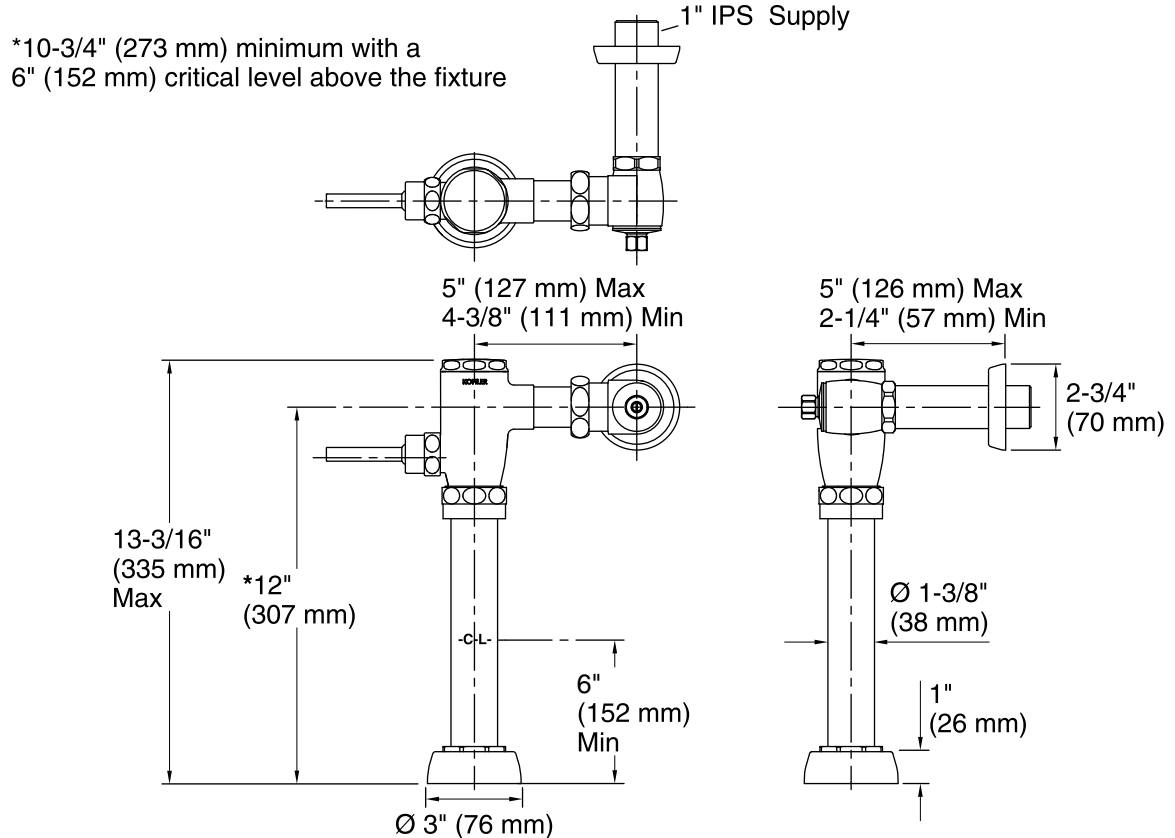

## Technical Information

All product dimensions are nominal.

## Pressure and Supply Requirements

Fixture pressure min 35 psi (241.3 kPa)  
(static):

Fixture flow rate min: 25 gpm (94.6 lpm)

Fixture pressure max 80 psi (551.6 kPa)  
(static):

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.