

Triton® Kitchen Sink Base Faucet K-7779-K

Features

- Brass construction.
- Brass valve bodies.
- Quarter-turn washerless ceramic disc valves.
- 8" (203 mm) spout reach.
- Multi-swivel swing spout.
- Rotating aerator.
- Matching finish sidespray.
- For 8" (203 mm) or 16" (406 mm) centers.
- Variety of handle style options.
- Lower flow aerator options are available (refer to the Kohler Price Book).
- Less drain.
- 2.2 gal/min (8.3 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

Required Accessories

K-16012-2 Standard Handles for Widespread Base Faucet

K-16012-3 Cross Handles for Widespread Base Faucet

K-16012-4 Lever Handles for Widespread Base Faucet or

K-16012-5 Wristblade Handles for Widespread Base Faucet

Optional Accessories

77619 Deep Rough-in Kit 1160595 .35 gpm Aerator, Medium 1011402 SD Spray Deep Rough-in Kit



ADA

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.





Triton® Kitchen Sink Base Faucet K-7779-K

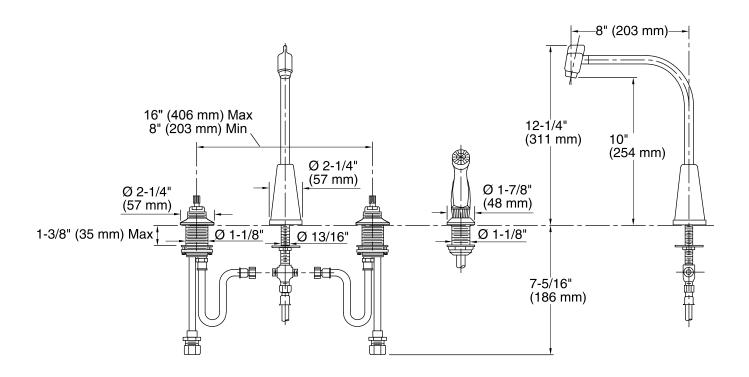

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 8" (203 mm)

Faucet:

Flow rate: 2.2 gal/min (8.3 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

