

## Features

- Center drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- Coordinates with other products in the Reve® collection.
- 66-15/16" (1700 mm) x 31-1/2" (800 mm) x 19-1/16" (484 mm)

## Material

- Cast iron with Safeguard® finish.

## Installation

- Drop-in or under-mount.

## Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## Recommended Accessories

K-136 Bath/BubbleMassage™ Under-mount Kit



## Codes/Standards

ASME A112.19.1/CSA B45.2

ASTM F462

ASTM F462




## KOHLER® Lifetime Limited Warranty for Cast Iron Components


See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

### Color Code Description

	0	White
	96	Biscuit
	47	Almond

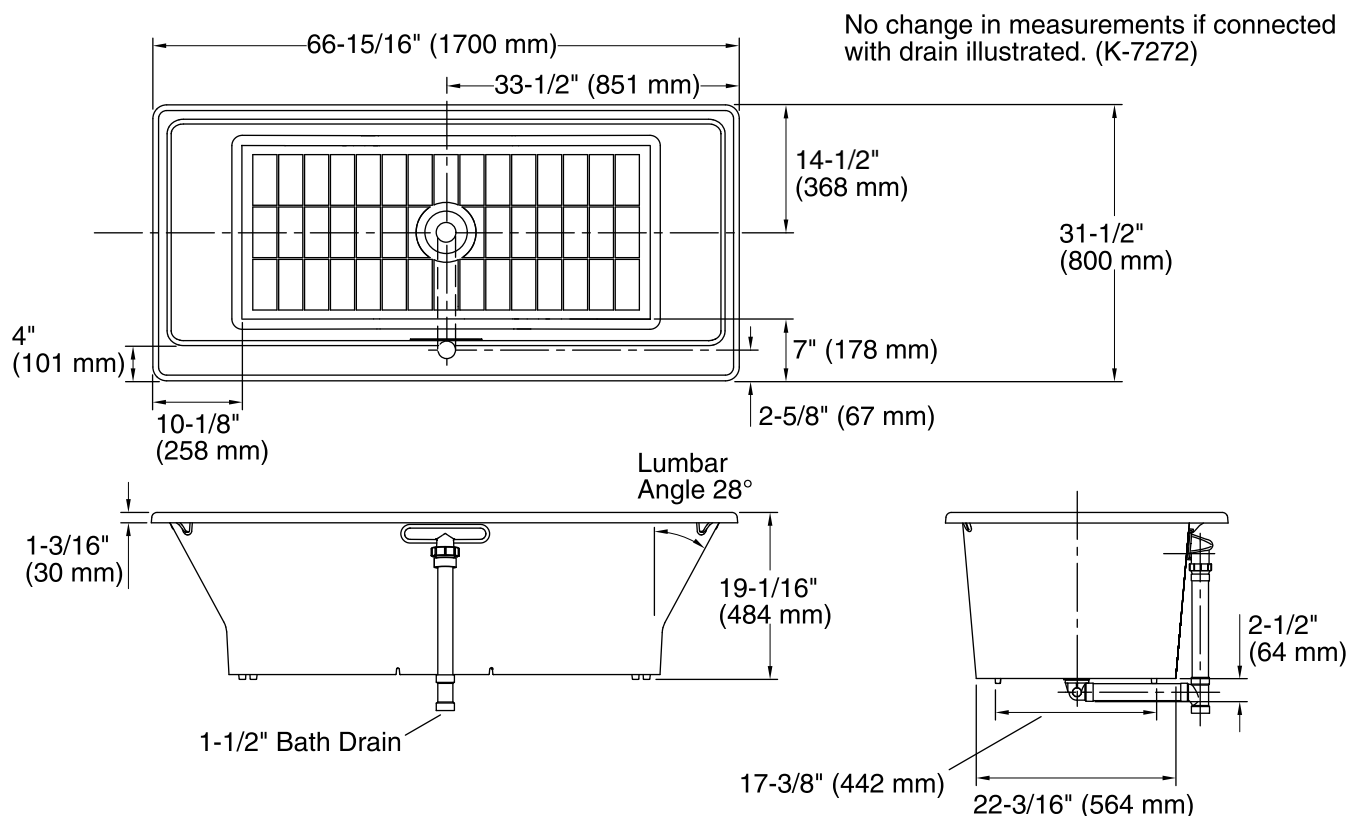

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	Center
Basin area, bottom:	49" x 22" (1245 mm x 559 mm)
Basin area, top:	62-1/2" x 24-3/4" (1588 mm x 629 mm)
Weight:	365 lbs (165.6 kg)
Minimum floor load:	78 lbs/ft² (380.8 kg/m²)
Water depth:	15-1/4" (387 mm)
Water capacity:	75 gal (283.9 L)
Cutout:	Drop-in, 66-1/2" x 31" (1689 mm x 787 mm)
Minimum flat for door:	0" (0 mm)

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

To clear the overflow side bath rim, a minimum 7" (178 mm) bath spout is recommended.

To clear the end wall bath rim, a minimum 10" (254 mm) bath spout is recommended.