



## Tea-for-Two® 5.5' Whirlpool Bath K-856-H2

### Features

- End drain.
- Integral lumbar support.
- 66" (1676 mm) x 36" (914 mm) x 24" (610 mm)

### Material

- Cast iron with Safeguard® finish.

### Hydrotherapy

- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.
- Remote control.

### Installation

- Drop-in or under-mount.

### Required Accessories

K-7147-AF 1-1/2" Contoured Pop-up Drain  
K-9698 Flexjet® Whirlpool Trim Kit

### Recommended Accessories

K-587 Under-mount Installation Kit  
K-1703 Whirlpool Remote Control  
K-9497 2-1/2" Keypad Trim













### Codes/Standards




ASME A112.19.1/CSA B45.2  
ASME A112.19.7/CSA B45.10  
ASTM F462  
UL 1795  
CSA C22.2 No. 218.2  
CARB P2

**KOHLER® Lifetime Limited Warranty  
for Cast Iron Components**  
See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

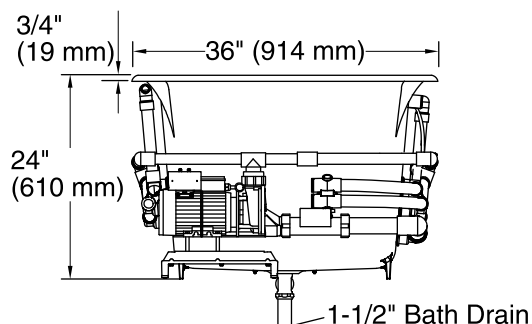

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.