

Features

- End drain.
- Integral lumbar support.
- 59" (1499 mm) x 27-1/2" (699 mm) x 16-3/4" (425 mm)

Material

• Cast iron with Safeguard[®] finish.

Installation

• Drop-in

Required Accessories

K-7161-AF Bath Drain

or

K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain

Recommended Accessories

K-18416 Adjustable Feet



Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 ASTM F462

KOHLER[®] Lifetime Limited Warranty for Cast Iron Components

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
| | 0 | \//b:te |


| 0 | vvnite |
|----|---------|
| 96 | Biscuit |



Soissons® 5' Bath **K-941**



Soissons® 5' Bath **K-941**

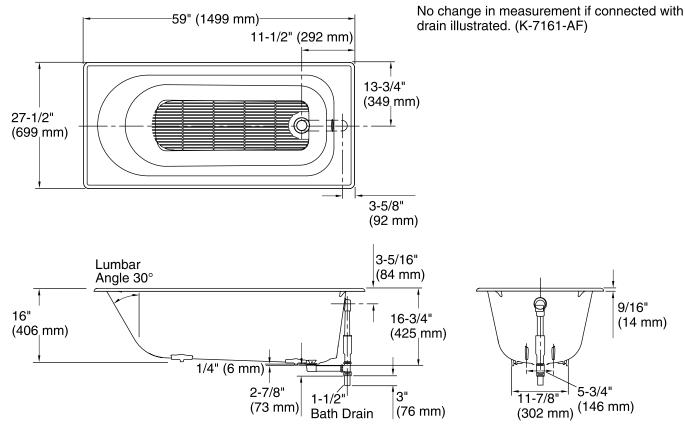

Technical Information

| All product dimensions | s are nominal. |
|------------------------|---|
| Installation: | Drop-in |
| Drain location: | End |
| Basin area, bottom: | 43-7/8" x 17-5/16" (1114 mm x 440 mm) |
| Basin area, top: | 51-7/16" x 21-15/16" (1307 mm x 557 mm) |
| Weight: | 232 lbs (105.2 kg) |
| Minimum floor load: | 50 lbs/ft² (244.1 kg/m²) |
| Water depth: | 11-5/16" (287 mm) |
| Water capacity: | 33.4 gal (126.4 L) |
| Cutout: | Drop-in, 57-1/2" x 26" (1461 mm x |
| | 660 mm) |
| Minimum flat for door: | 1" (25 mm) |
| | |

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

