



# Memoirs®

## 48" x 34" Shower Base

### K-9548



#### Features

- Integral flange.
- Right drain.
- Textured bottom surface.
- One-piece construction.
- Coordinates with other products in the Memoirs collection.
- Coordinates with Choreograph™ walls.

#### Material

- Acrylic
- Reinforced with fiberglass (FRP).

#### Installation

- Alcove or corner.

#### Recommended Accessories

K-9132 Shower Drain



#### Codes/Standards











ASME A112.19.1/CSA B45.2  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
Greenguard UL 2818 - Gold

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | 33   | Mexican Sand™ |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

12-20-2016 07:54

THE BOLD LOOK  
OF **KOHLER**®

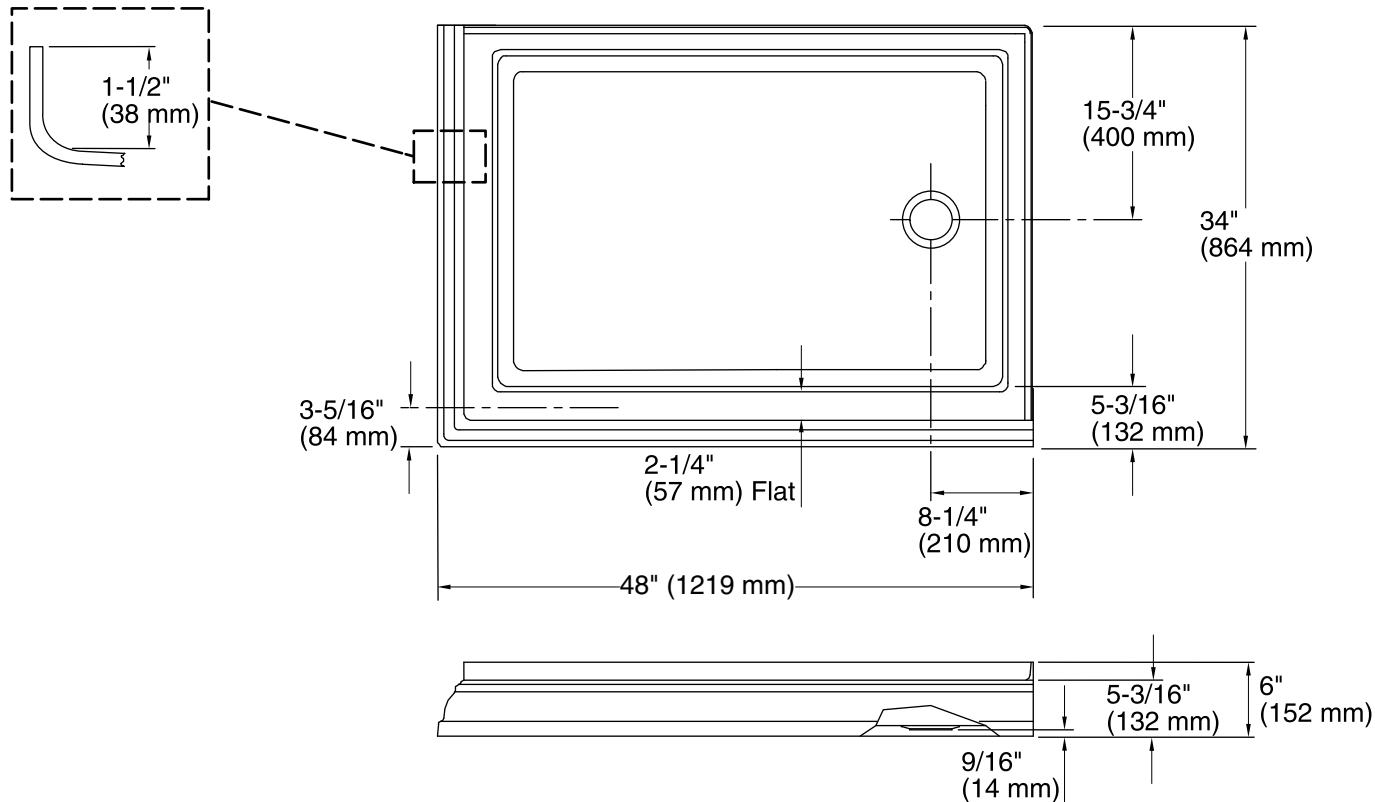

## Technical Information

All product dimensions are nominal.

|                        |  |
|------------------------|--|
| Installation:          | Corner, 3-Wall Alcove                            |
| Drain location:        | Right  |
| Drain hole diameter:   | 3-3/8" (86 mm)                                   |
| Weight:                | 36 lbs (16.3 kg)                                 |
| Minimum floor load:    | 20 lbs/ft <sup>2</sup> (97.6 kg/m <sup>2</sup> ) |
| Minimum flat for door: | 0" (0 mm)  |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

Shimming may be required to level the fixture.

Shimming between stud frame and fixture may be required.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).