



Memoirs®

48" x 48" Shower Base

K-9567



Features

- Integral flange.
- Rear center drain.
- Large footprint ideal for custom shower spaces.
- Textured bottom surface.
- Coordinates with other products in the Memoirs collection.
- Coordinates with Choreograph™ walls.

Material

- Acrylic
- Reinforced with fiberglass (FRP).

Installation

- Alcove

Recommended Accessories

K-9132 Shower Drain
K-702208-G54 Frameless Sliding Shower Door
K-702208-G73 Frameless Sliding Shower Door
K-702208-L Frameless Sliding Shower Door
K-702209-L Frameless Sliding Shower Door
K-705808-L Semi-Frameless Pivot Shower Door
K-705809-L Semi-Frameless Pivot Shower Door
K-705822-L Semi-Frameless Pivot Shower Door
K-705823-L Semi-Frameless Pivot Shower Door
K-706010-L Frameless Sliding Shower Door
K-706011-L Frameless Sliding Shower Door
K-706016-L Frameless Sliding Shower Door
K-706017-L Frameless Sliding Shower Door



Codes/Standards

ASME A112.19.1/CSA B45.2
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 07:54

THE BOLD LOOK
OF **KOHLER**®

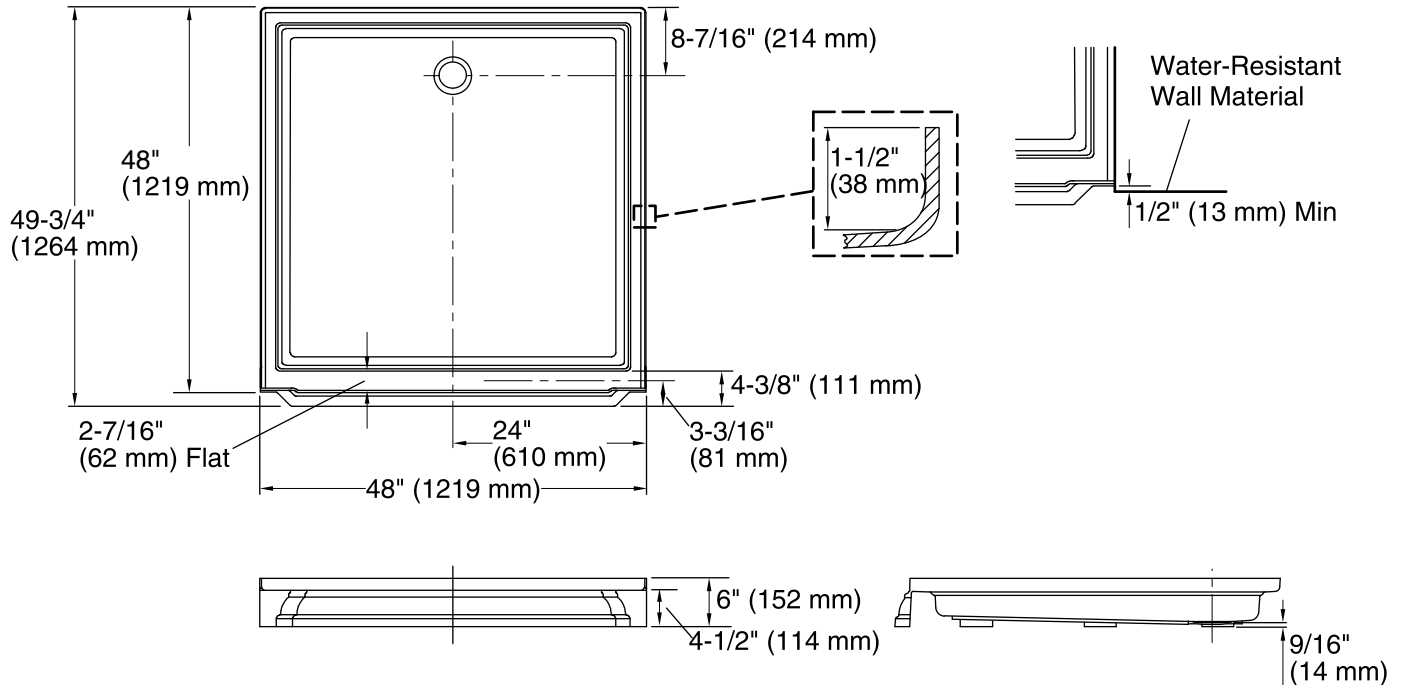

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove
Drain location: Center rear
Drain hole diameter: 3-3/8" (86 mm)
Weight: 55 lbs (24.9 kg)
Minimum floor load: 20 lbs/ft² (97.6 kg/m²)
Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.
Install this product according to the installation instructions.
Shimming may be required to level the fixture.
Shimming between stud frame and fixture may be required.
Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).