



# Persuade®

## The Complete Solution® Toilet

### K-98864

#### Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Top-mount two-button flush offers a choice of 1.0 or 1.6 gallons per flush (gpf).
- Skirted trapway simplifies cleaning.
- Complete Solution toilets provide everything you need in one box, including bowl, tank, seat, wax ring, supply line, and floor hardware.
- Combination consists of the K-4326 bowl and the K-4441 tank.
- Coordinates with other products in the Persuade Curv collection.
- Available exclusively at Lowe's.

#### Technology

- Dual-flush technology allows you to choose between a full- or partial-flush.

#### Installation

- Standard 12-inch rough-in.
- Two-bolt installation.

#### Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

#### Recommended Accessories

K-7659 Angle Stop  
K-7668 Straight Stop

#### Components

Additional included component/s: Bowl, Tank, Tank cover, Push-buttons, Toilet seat, Supply hose, and Wax ring and hardware installation kit.



#### Codes/Standards

ASME A112.19.2/CSA B45.1  
ASME A112.19.14  
EPA WaterSense®


#### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
--	---	-------

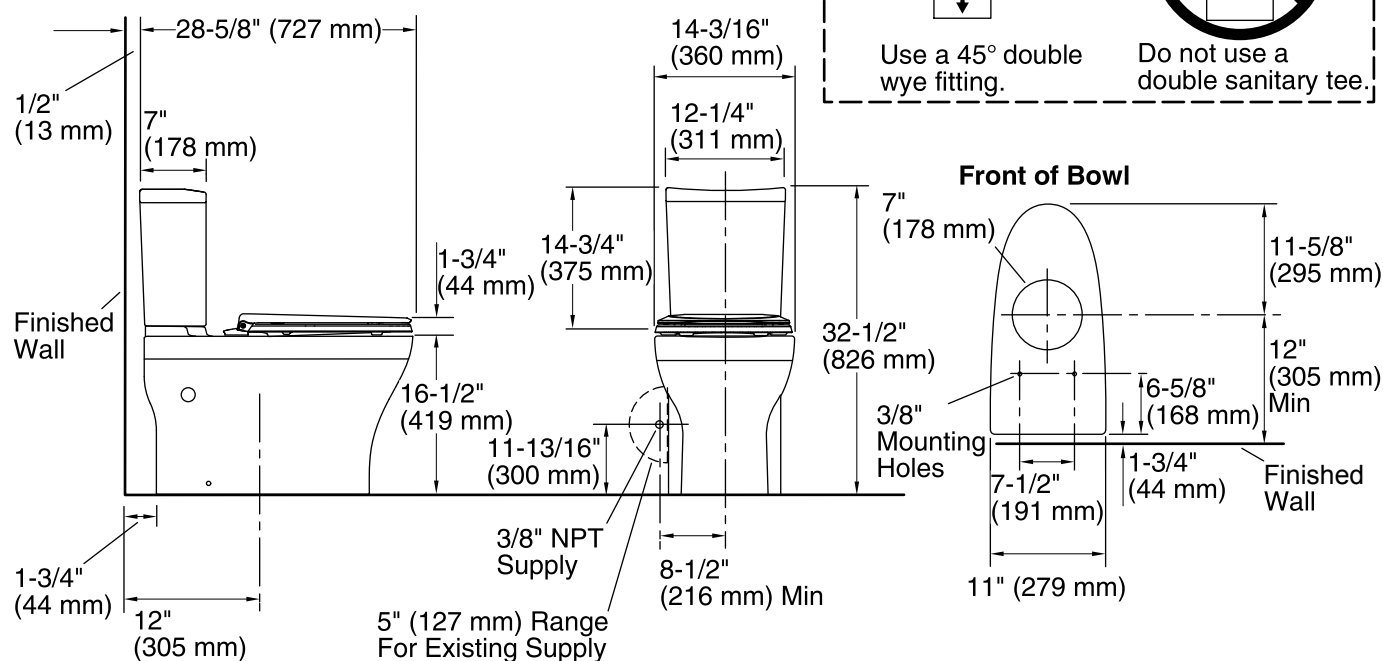

## Technical Information

All product dimensions are nominal.

Toilet type:	Two-piece
Bowl shape:	Elongated front
Trap passageway:	2" (51 mm)
Water Consumption	
Full:	1.6 gpf (6 lpf)
Reduced:	1 gpf (3.8 lpf)
Water surface size:	4-1/2" x 5-3/4" (114 mm x 146 mm)
Rim to water surface:	8-1/2" (216 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

## Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

**IMPORTANT!** The rough-in must be 12" (305 mm) or more from the base of the wall or baseboard. Install or relocate the supply and outlet as necessary to conform to rough-in dimensions.

If this toilet is installed in new construction, install a new supply stop following the dimensions in the diagram.

For retrofit installations, the existing supply stop may need to be relocated if it is less than 8-1/2" (216 mm) from the centerline of the toilet. Dry fit the toilet to confirm if the supply stop needs to be relocated.

The supplied hose will extend roughly 6" (152 mm) from the toilet. If the supplied hose does not reach the supply stop, a longer supply hose may be used.