Features
- Round bowl.
- Comfort Height®.
- AquaPiston® flushing system.
- Touchless technology allows hands-free operation to actuate the flush.
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway.
- Less supply.
- 11-1/2" (292 mm) x 9-1/4" (235 mm) water area.

Material
- Vitreous china.

Installation
- 12" (305 mm) rough-in.
- 27-1/4" (692 mm) x 17-5/8" (448 mm) x 30-1/2" (775 mm)

Optional Accessories
K-7637 Angle Supply with Stop (single)

Components
Product includes:
K-4347 Comfort Height® Round-front Bowl
K-5693 Toilet Tank Round-Front Touchless
Additional included component/s: Brevia™ seat, Cover, Wax ring, Touchless Flush Kit, and Floor hardware.

WaterSense
Meets EPA Criteria
Certified by
IAPMO R&T

Codes/Standards
ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
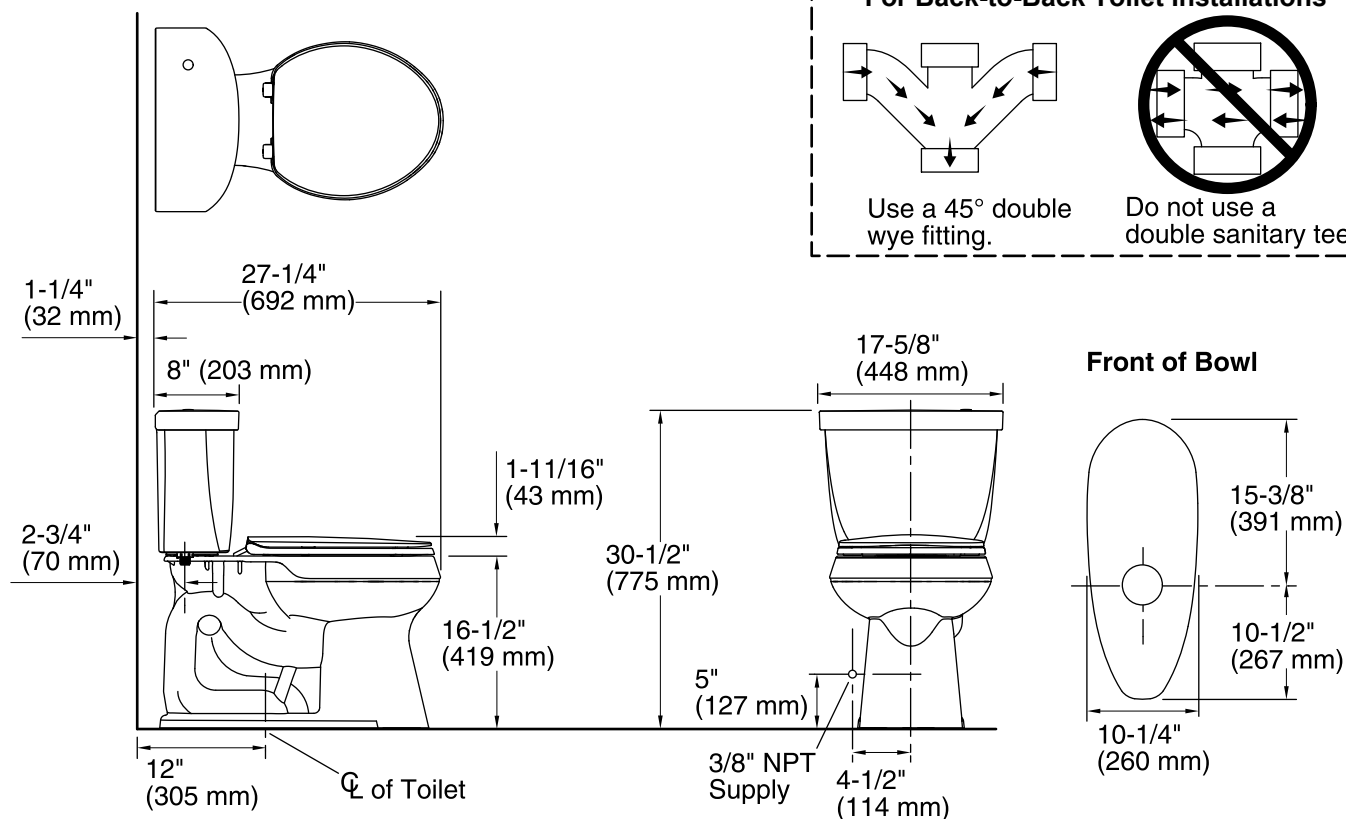California Energy Commission (CEC)

KOHLER® One-Year Limited Warranty
See website for detailed warranty information.

Available Color/Finishes
Color tiles intended for reference only.

Color	Code	Description
	0	White

USA/Canada: 1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
1-13-2017 07:18

THE BOLD LOOK
OF KOHLER®

For Back-to-Back Toilet Installations

Use a 45° double wye fitting.

Do not use a double sanitary tee.

1-1/4" (32 mm)

27-1/4" (692 mm)

8" (203 mm)

1-11/16" (43 mm)

2-3/4" (70 mm)

16-1/2" (419 mm)

12" (305 mm)

℄ of Toilet

17-5/8" (448 mm)

30-1/2" (775 mm)

5" (127 mm)

3/8" NPT Supply

4-1/2" (114 mm)

Front of Bowl

15-3/8" (391 mm)

10-1/2" (267 mm)

10-1/4" (260 mm)

Technical Information
All product dimensions are nominal.

Toilet type:	Two-piece
Bowl shape:	Round front
Trap passageway:	2-1/8" (54 mm)
Water Consumption Full:	1.28 gpf (4.8 lpf)
Water surface size:	11-1/2" x 9-1/4" (292 mm x 235 mm)
Rim to water surface:	5-1/4" (133 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Notes
Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.