

Damask® Vanity K-99563-LG

Features

- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Frameless construction with full-overlay doors.
- Three-way adjustable slow-close door hinges with 110-degree opening capability for easy cabinet access.
- Full-extension 18" depth drawers with slow-close under-mount slides for smooth opening.
- Optional adjustable shelf (sold separately).
- Coordinates with other products in the Damask™ collection.
- Door pulls are sold separately.

Material

Solid wood and veneers.

Recommended Accessories

K-3052-1 Vanity-top Bathroom Sink

K-3052-4 Vanity-top Bathroom Sink

K-3052-8 Vanity-top Bathroom Sink

K-99679-SH12 Rollout Drawer

K-99738 Appliance Tray

K-99677-SH12 Adjustable Shelf

K-99680-SH12 Rollout Tray

K-99686 Knob

K-99678-SH12 Adjustable Shelf with Electrical Outlets

Optional Accessories

K-99007 Mirrored Cabinet

K-99566 In-drawer Electrical Outlet

K-99567 Roll-out Hot Appliance Storage

K-99662-15 Medicine Cabinet Surround

K-99662-24 Medicine Cabinet Surround

K-99665 Framed Mirror

K-99676 Filler Strip

K-99668 Lap Drawer

K-99672 Two-Drawer Bridge

K-99675 Medicine Cabinet Side Kit

K-99681 Side Mount Electrical Outlets

K-99682 General Storage

K-99683 Makeup Storage

K-99684 Drawer Dividers

K-99689 Handle

K-5451 Bathroom Vanity Top - Side Splash



Codes/Standards

CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	1WA	Linen White
100	1WF	Khaki White Oak
	1WD	Ramie Walnut
	1WG	Cherry Tweed
	1WB	Claret Suede
	1WC	Felt Grey
	1WE	Terry Walnut
	1WT	Mohair Grey
	1WU	Batiste Black





Damask® Vanity K-99563-LG

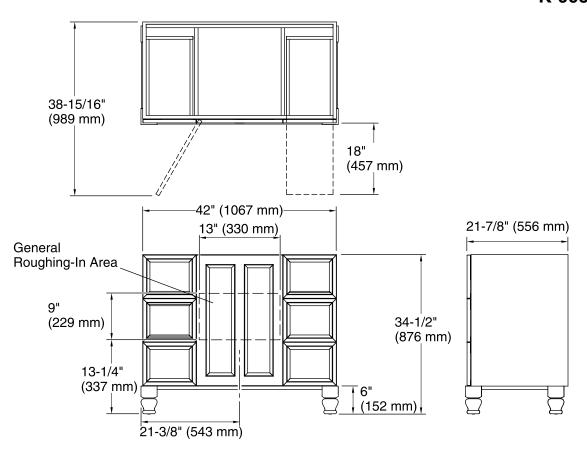

Technical Information

All product dimensions are nominal.

Vanity type: Standard

Notes

Install this product according to the installation guide.

Decorative cabinet hardware is not supplied. Refer to the KOHLER bath accessories line for recommended cabinet hardware to complement your vanity.

To properly support the weight of the vanity and sink, secure to stud framing or 2x6 bracing behind the finished wall.

Select 500 lb (227 kg) load bearing 5/16" lag bolts with a length to clear obstacles in the wall and 5/16" washers.

Plan for electrical service if installing the optional electrical strip. Any electrical accessory components must be connected to a circuit protected by a Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

