

Features

- Brass construction
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Red/Blue indexing
- ADA compliant
- One-piece, self-contained ceramic disc valve controls both volume and temperature control
- Temperature memory allows the faucet to be turned on and off at any temperature setting
- Flexible supplies for easy installation

Installed component/s: Flexible supply hoses.



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

Color **Code** **Description**



CP Polished Chrome

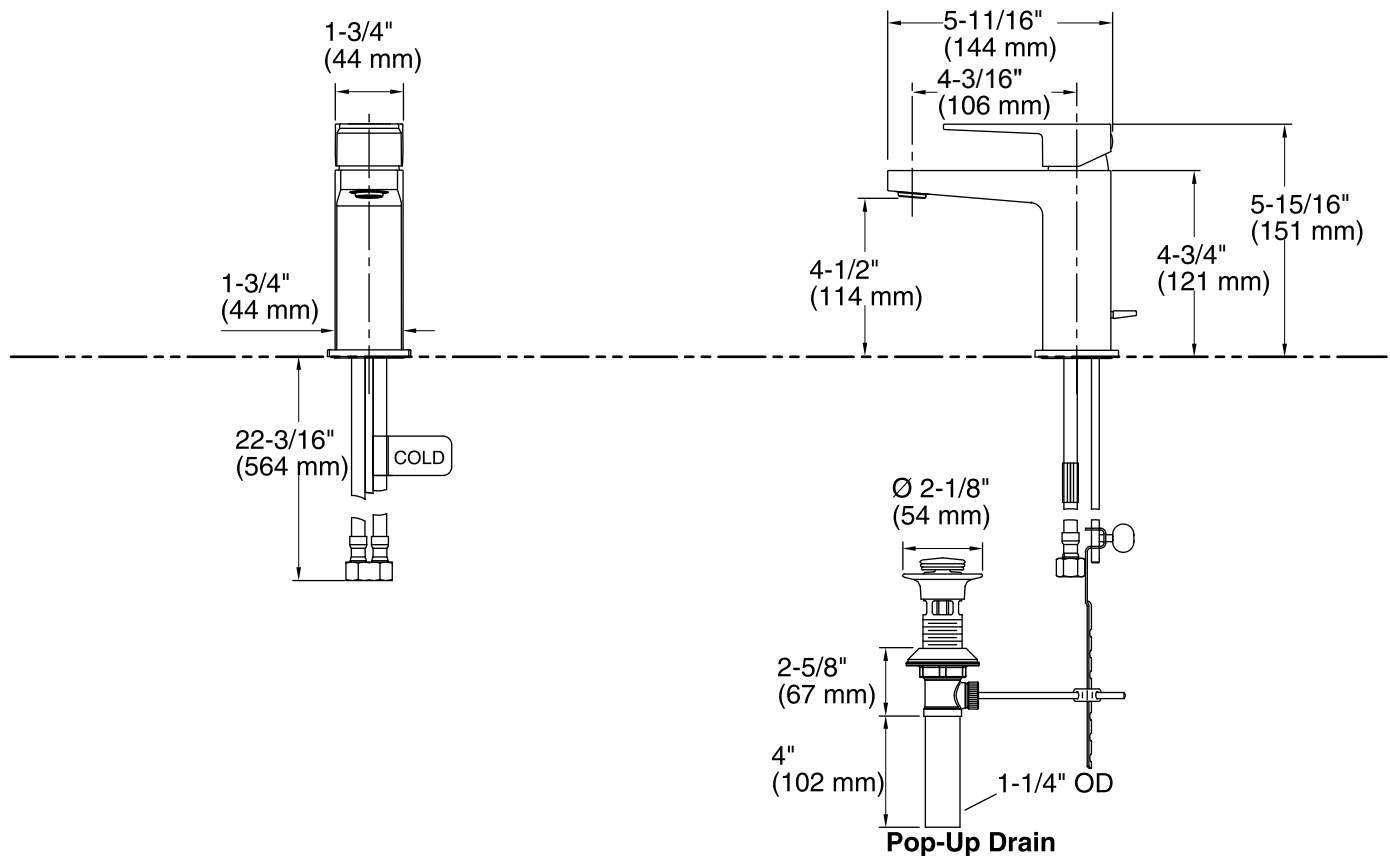

Technical Information

All product dimensions are nominal.

Valve body: Plastic
Drain included: YES
Drain with overflow: YES
Drain tailpiece included: YES

Spout:

Spout reach: 4-3/16" (106 mm)
Handle clearance: 3-3/8" (86 mm)

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.