

Elliston® Pullout Kitchen Faucet K-R16399-SD

Features

- Single level handle is simple to use and makes adjusting water temperature easy.
- Two-function pullout sprayhead with touch-control allow you to switch from stream to spray.
- ProMotion™ technology's light, quiet nylon hose and ball joint make the pullout sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Includes soap/lotion dispenser.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- KOHLER finishes featuring ScratchSheild[™] technology withstands even the toughest of daily use.
- Constructed with premium materials for durability and reliability.
- Installs with 1-, 2-, 3-, or 4-hold sink (adapter plate included)

Installation

Flexible supply lines and installation ring make installation easy.



Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless





Elliston®

Pullout Kitchen Faucet K-R16399-SD

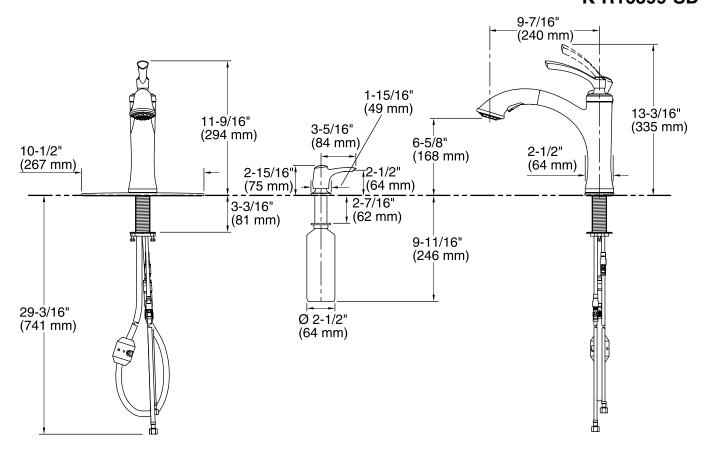

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 9-7/16" (239 mm)

Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

