

## Features

- Quarter-turn washerless ceramic disc valves.
- Pop-up drain with tailpiece.
- For 4" (102 mm) centers.
- 5" (127 mm) spout reach.
- 1.5 gpm (5.7 lpm) maximum flow rate.

## Material

- Metal construction.



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

EPA WaterSense®

ADA


ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

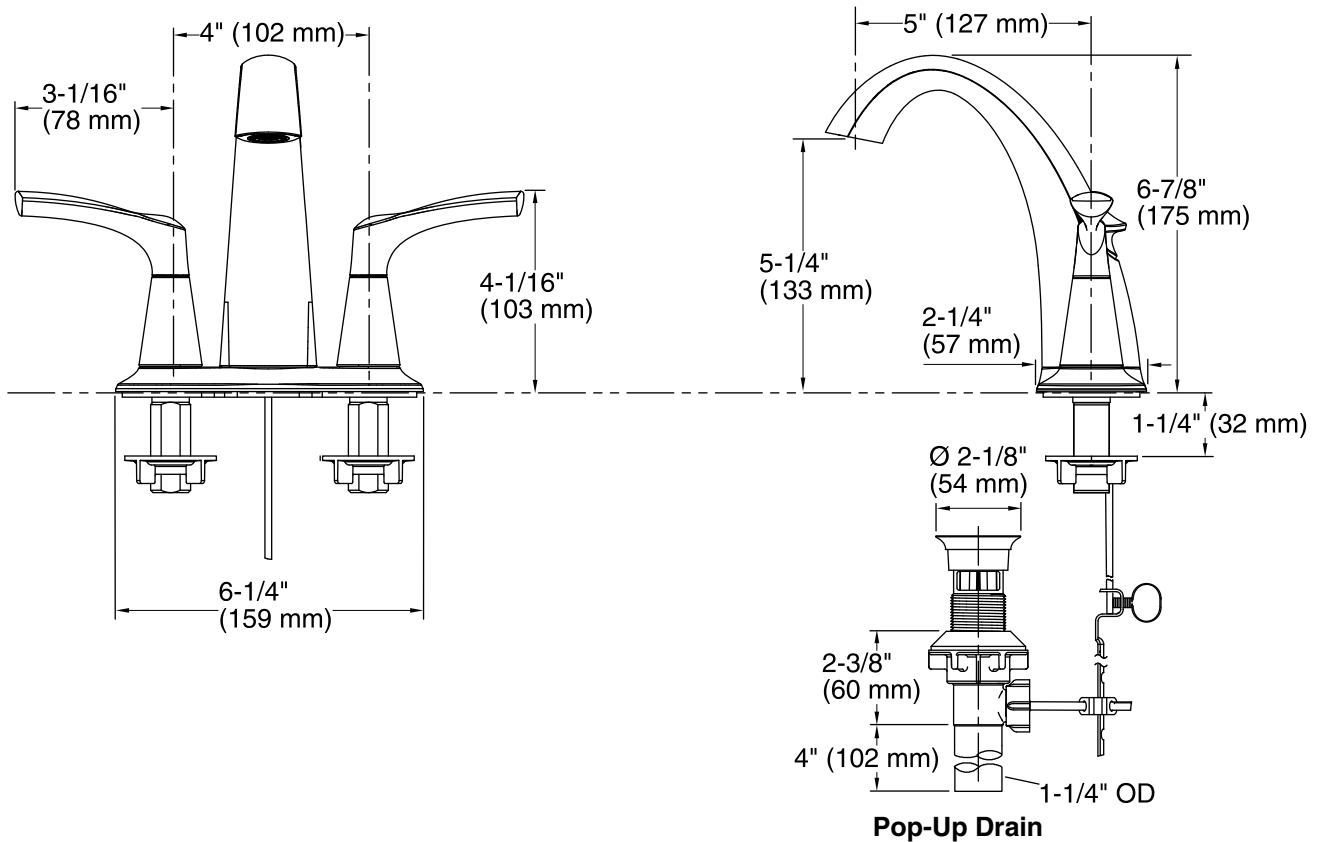

### Technical Information

All product dimensions are nominal.

Drain included: YES

Drain tailpiece included: YES

### Spout:

Spout reach: 5" (127 mm)

Handle clearance: 3-1/16" (78 mm)

### Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.