

Fluence[®]

Frameless Sliding Shower Door K-R702206-D3

Features

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Frameless, 1/4" (6 mm) thick Frosted tempered glass door.
- Reversible top track and towel bar.
- Gently curved inside and outside towel bars.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning.

Material

- Anodized aluminum hardware prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

Components

Additional included component/s: Hardware Kit.



Codes/Standards

ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201 Cat II ASTM C1036 ASTM C1048 ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	MX	Matte Nickel
	DR	Deep Bronze

Available Glass Options
Code Description


Frosted





Fluence[®]

Frameless Sliding Shower Door K-R702206-D3

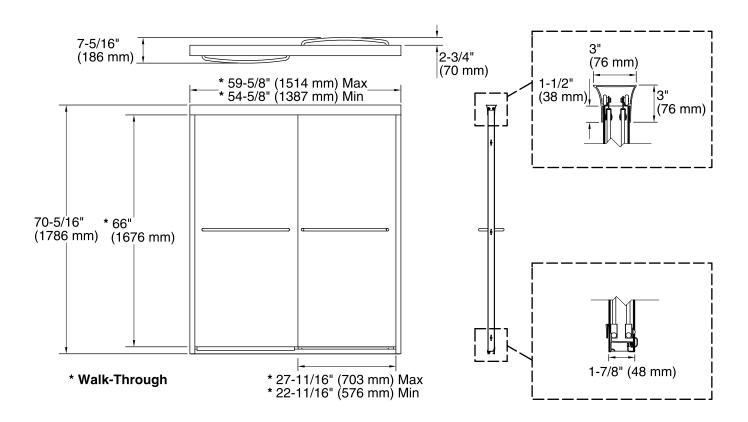

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass
Opening Width - Min: 54-5/8" (1387 mm)
Opening Width - Max: 59-5/8" (1514 mm)
Walk-through - Min: 22-11/16" (576 mm)
Walk-through - Max: 27-11/16" (703 mm)

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

NOTICE: The vertical opening should be a minimum of 72" (1829 mm) to allow clearance for installing the top track over the wall jambs.

