

## Features

- Two lever handles offer separate control of hot and cold water.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Constructed with premium materials.
- KOHLER finishes resist corrosion and tarnishing.
- 1.2 gpm (gallons per minute) flow rate.
- Includes faucet with preassembled supply lines, lift rod and pop-up drain assembly with 1-1/4-inch tailpiece.
- Coordinates with other products in the Elliston collection.

## Water Conservation & Rebates

- WaterSense®-labeled 1.2-gpm faucets use at least 45 percent less water than standard 2.2-gpm faucets while still meeting strict performance guidelines.



**ADA**

**CSA B651**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA



ICC/ANSI A117.1


CSA B651

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

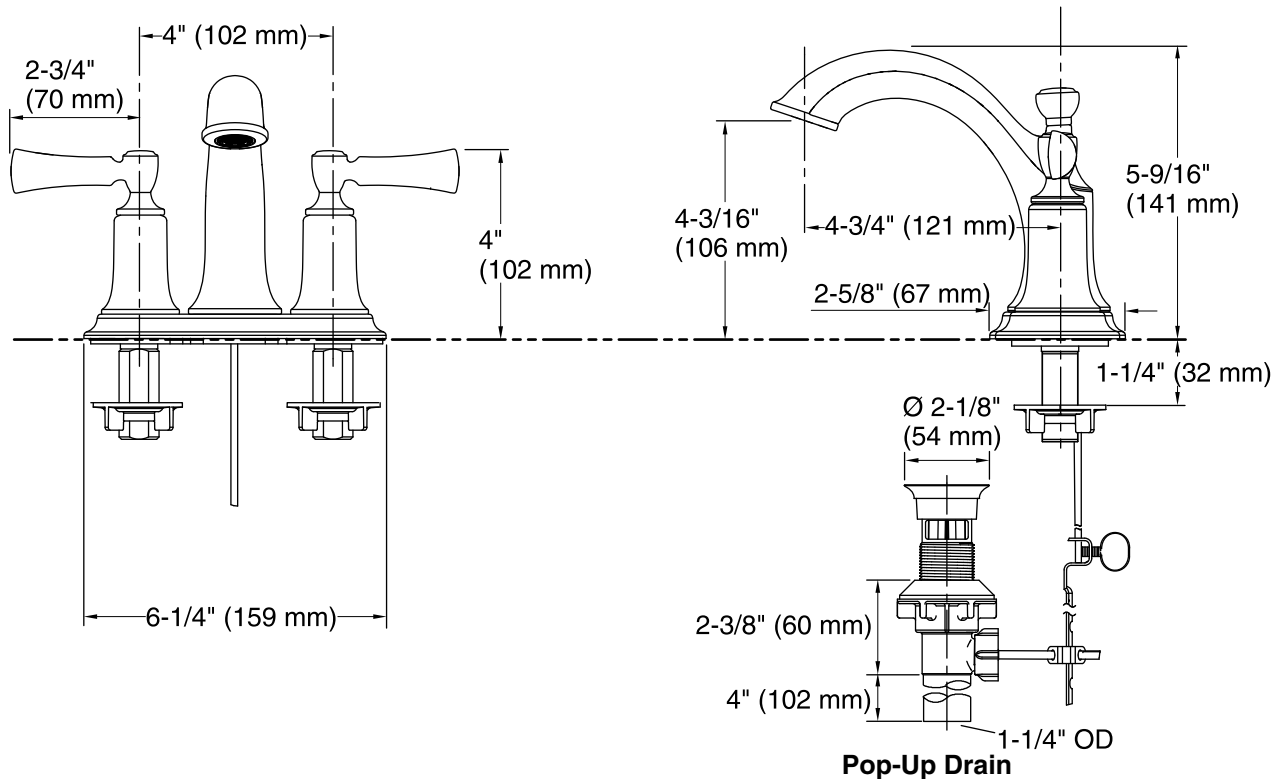

## Technical Information

All product dimensions are nominal.

Drain included: YES

Drain tailpiece included: YES

## Spout:

Spout reach: 4-3/4" (121 mm)

Handle clearance: 2-3/4" (70 mm)

## Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

## Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.