

Features

- Single-handle lever allows you to quickly adjust the volume and temperature to your desired level
- Single-function showerhead provides superior spray coverage
- MasterClean™ spray nozzles prohibit mineral buildup for easy cleaning
- Rite-Temp® pressure-balancing valve maintains preset temperature when water pressure suddenly drops. Scald guard protects from sudden hot/freezing water when a toilet is flushed or dishwasher starts
- 2.0 gpm (gallons per minute) flow rate
- Limited lifetime warranty

Installation

- Heavy duty slip-fit clamp design and NPT threaded spout



Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992



EPA WaterSense®


California Energy Commission (CEC)

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

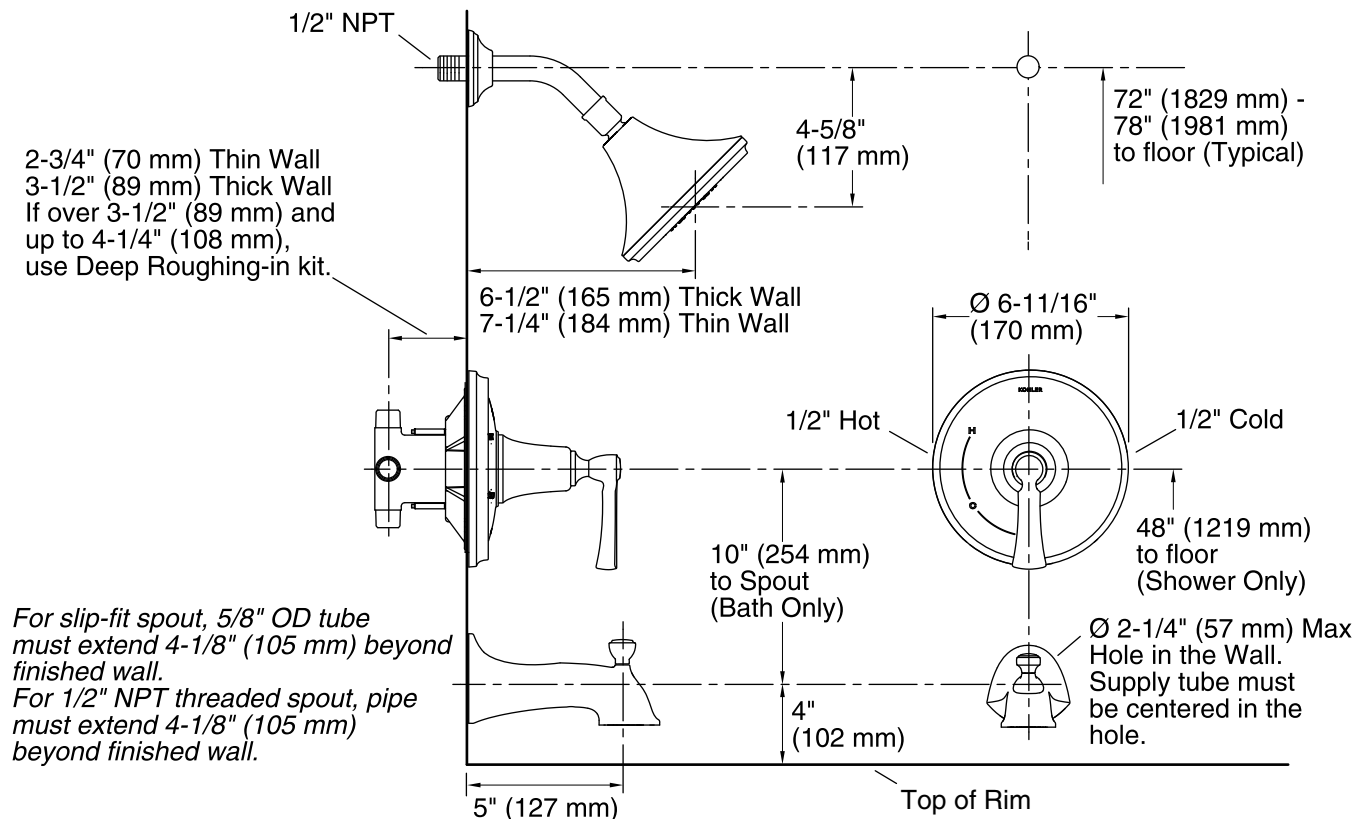

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install a shut-off device on either valve outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.