

### Features

- Two lever handles offer separate control of hot and cold water.
- KOHLER ScratchShield™ finish resists tarnishing and corrosion.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.

### Material

- Premium metal construction.

### Installation

- Simplified faucet assembly; mounting hardware requires no special tools.

### Water Conservation & Rebates

- 1.2 gpm (gallons per minute) flow rate.



ADA

### Codes/Standards



ASME A112.18.1/CSA B125.1  
NSF 61  
NSF 372  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

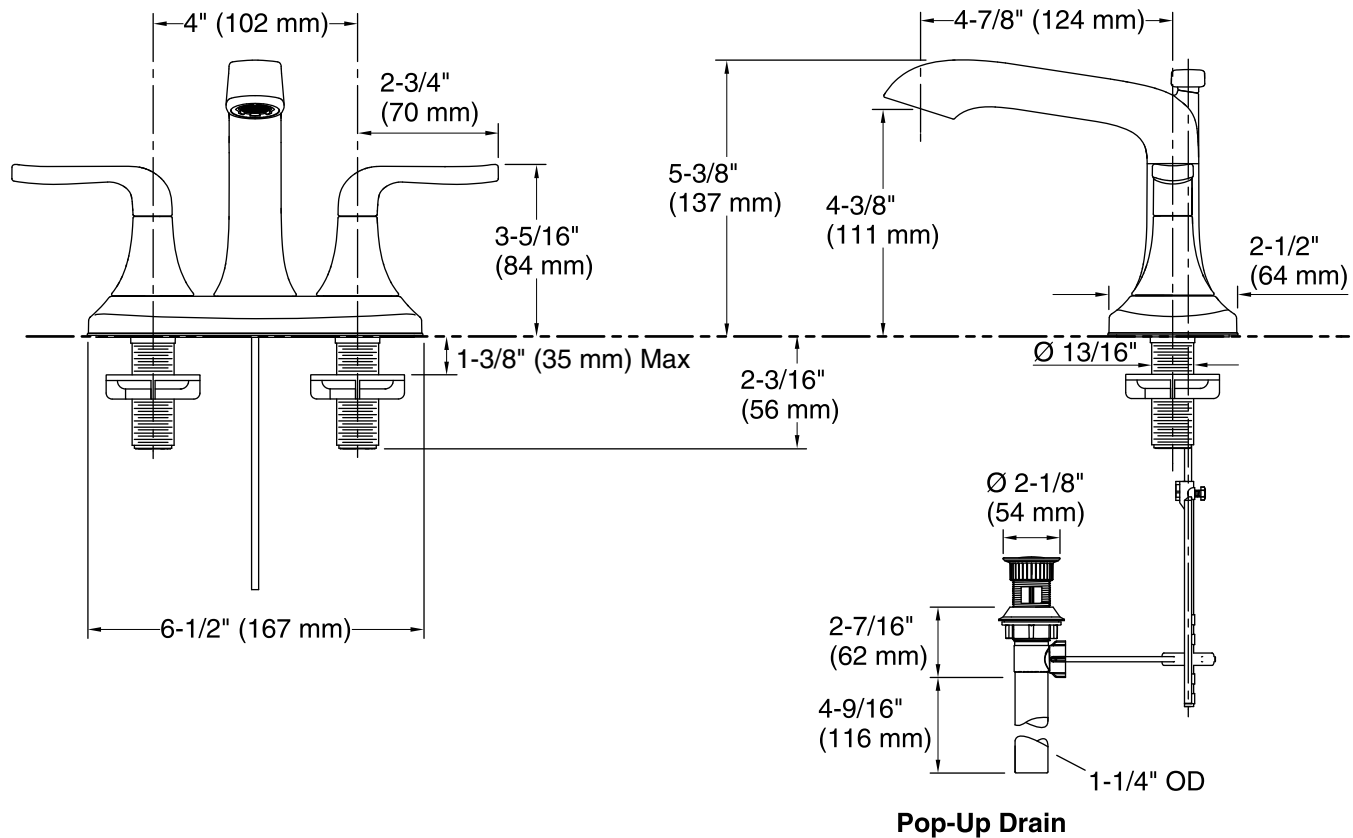

### Technical Information

All product dimensions are nominal.

#### Spout:

Spout reach: 4-7/8" (124 mm)

Handle clearance: 2-3/4" (70 mm)

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 45 psi (3.1 bar)

### Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.