

## Features

- Two-handle centerset faucet for 4-inch centers.
- Two lever handles offer separate control of hot and cold water.
- Spout swivels to allow for unobstructed use of the sink.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Constructed of premium materials for durability and reliability.
- KOHLER finishes resist tarnishing and corrosion.
- 1.2 gpm (gallons per minute) maximum flow rate.

## Installation

- Simplified faucet assembly; mounting hardware requires no special tools.

## Water Conservation & Rebates

- WaterSense®-labeled faucets use at least 30 percent less water than standard 2.2-gpm faucets while still meeting strict performance guidelines.



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*


### Color Code Description



BN Vibrant® Brushed Nickel



2BZ Oil-Rubbed Bronze

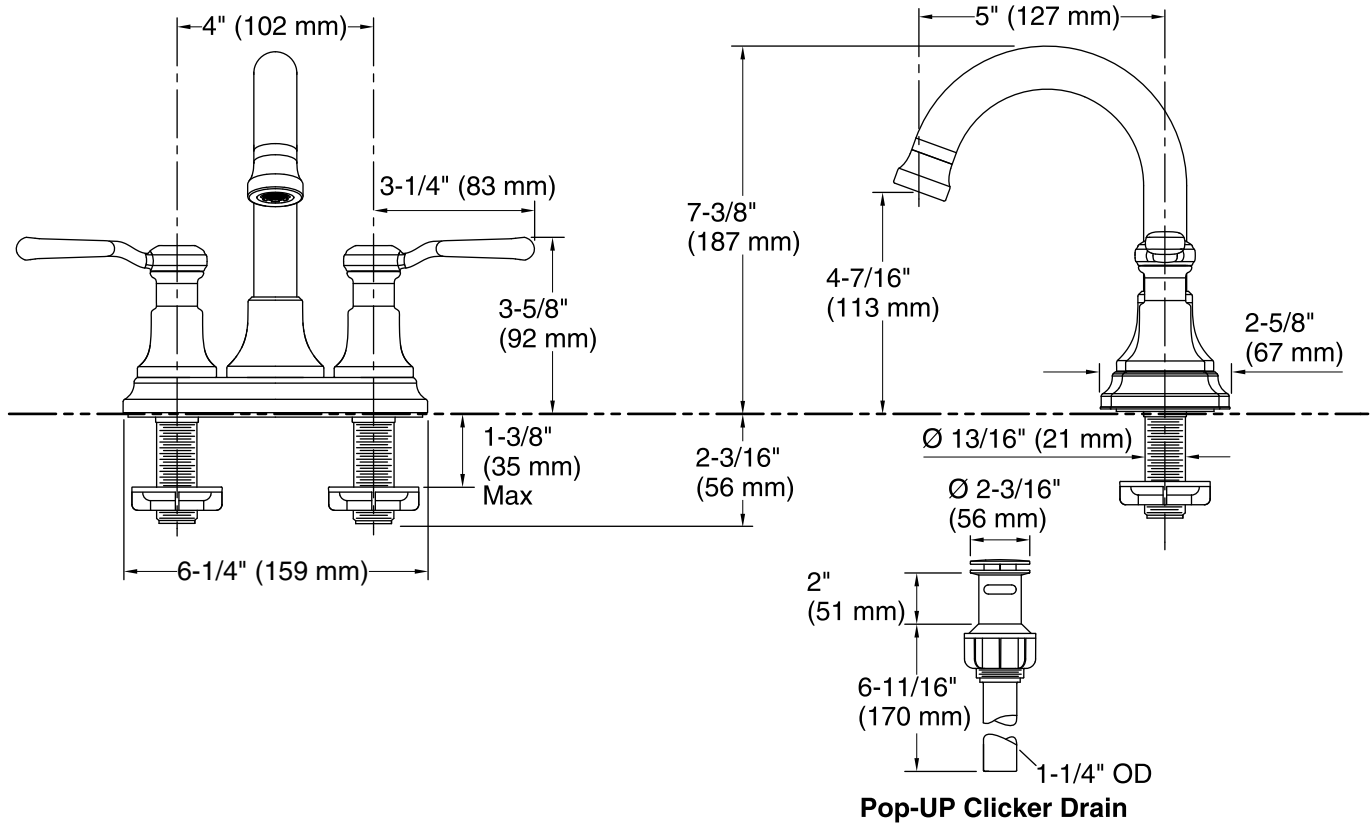

## Technical Information

All product dimensions are nominal.

### Spout:

Spout reach: 5" (127 mm)  
Handle clearance: 3-1/4" (83 mm)

### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)  
Pressure: 45 psi (3.1 bar)

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.