

Features

- Response® technology provides reliable touchless on/off operation through a state-of-the-art sensor that responds in milliseconds.
- Precision activation window helps prevent false activations.
- DockNetik®, a magnetic docking system located within the spout, smoothly glides and securely locks the sprayhead into place.
- Powered by 6-AA batteries, which will last for 1-year under normal use. AC power adapter is available (purchased separately).
- High-arch spout offers superior clearance for filling pots and cleaning.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion™ technology's light, quiet braided hose and ball joint make the pull-down sprayhead easier and more comfortable to use.
- Two-function pull-down sprayhead with touch-control allows you to switch from stream to Sweep® spray.
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- MasterClean™ sprayface features and easy-to-clean surface that withstands mineral buildup.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.

Material

- Premium metal construction.
- Kohler finishes with ScratchShield™ technology withstands even the toughest daily use.

Installation

- Installs with 1-, 2-, 3-, or 4-hole sinks (escutcheon plate included).
- Flexible supply lines and quick-connect fittings make installation easy.
- Longer shank works with countertops up to 2-1/2 inches thick and is easy to install. Simply hand tighten and secure with a screwdriver.
- Soap / lotion dispenser included.



ADA

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

	VS	Vibrant® Stainless
--	----	--------------------

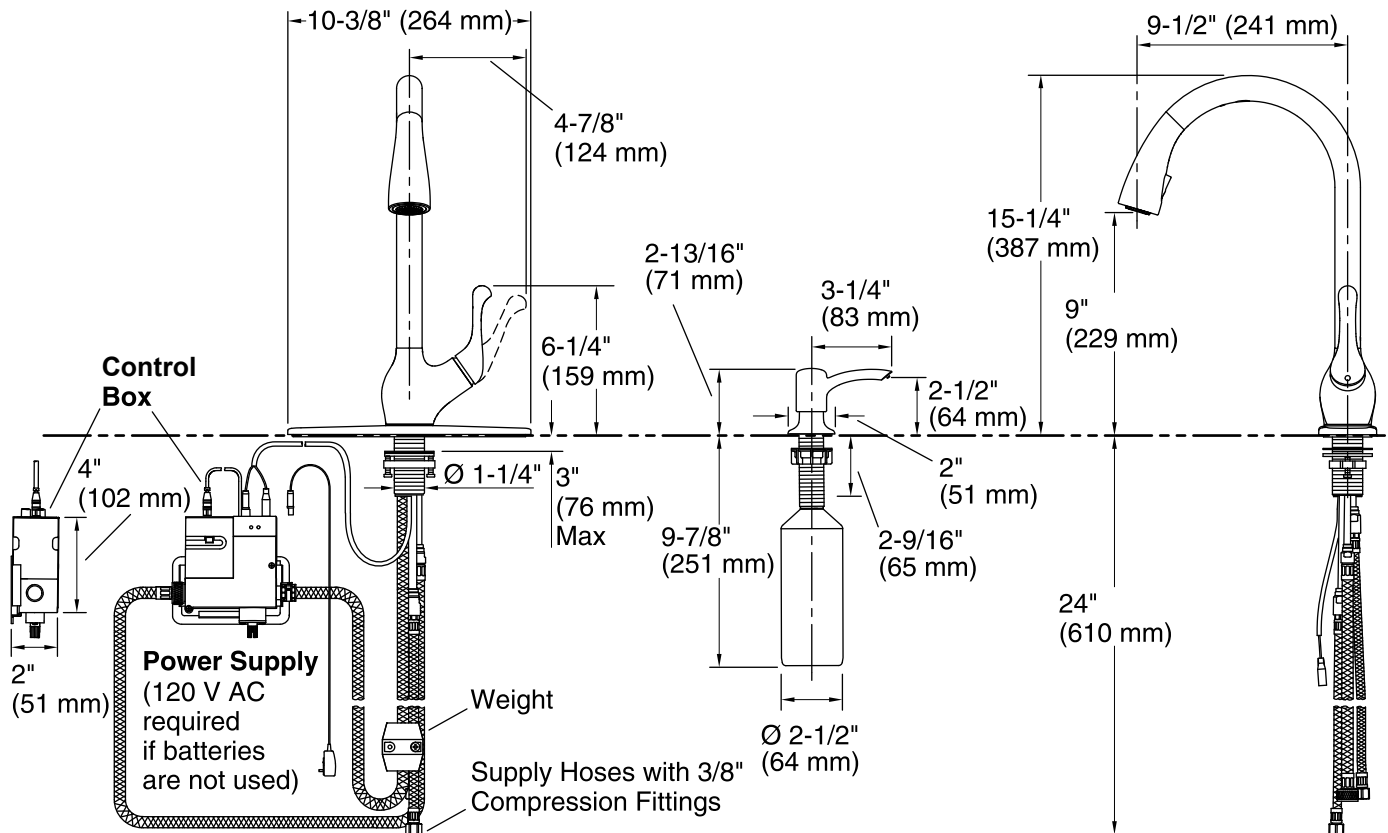

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)
Pressure: 60 psi (4.1 bar)
Power source: AA 1.5 V, included

Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.