

## Features

- Two-handle widespread bathroom sink faucet for 8" - 16" centers.
- UltraGlide® engineered ceramic disc valves resist deterioration and mineral buildup, resulting in long-lasting, reliable performance.
- Constructed of premium materials.
- KOHLER finishes resist corrosion and tarnishing.
- 1.2 gpm (gallons per minute) maximum flow rate.
- Handles come pre-assembled on valves to simplify installation.
- Coordinates with other products in the Willamette collection.

## Water Conservation & Rebates

- WaterSense®-labeled 1.2gpm faucets use at least 45 percent less water than standard 2.2-gpm faucets while still meeting strict performance guidelines.

Loose component/s: Quick Connect Tee, and Quick Connect Outlet Hoses.



**ADA**

**CSA B651**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

See website for detailed warranty information.


## Available Color/Finishes

*Color tiles intended for reference only.*

### Color Code Description



BN Vibrant® Brushed Nickel

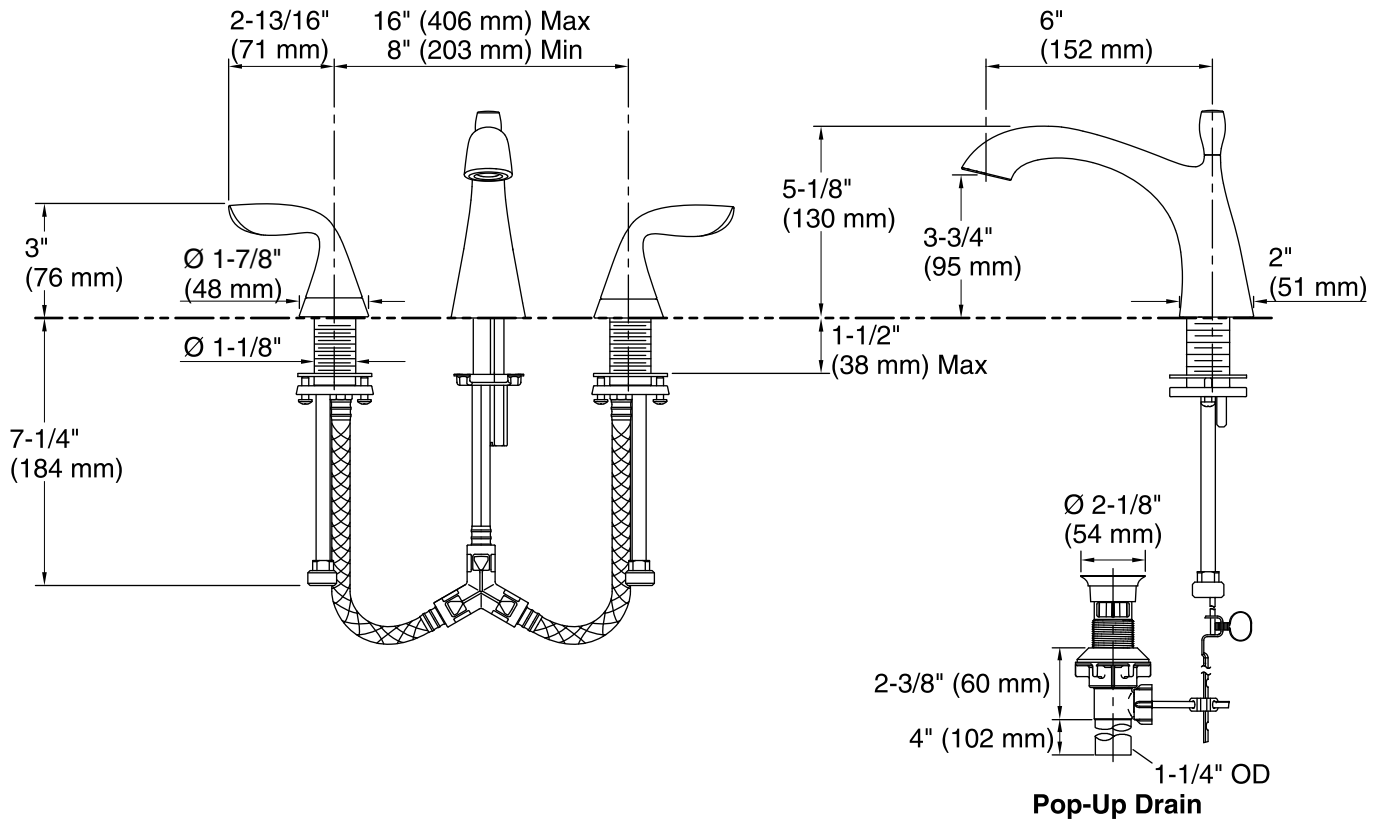

## Technical Information

All product dimensions are nominal.

Drain included: YES

Drain tailpiece included: YES

## Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

## Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.