

Features

- Advanced spray engine provides three spray options: powerful massage, intense drenching, or wide coverage.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- KOHLER finishes resist corrosion and tarnishing for durability and reliability.
- Coordinates with other products in the Willamette collection.

Material

- Premium material for durability and reliability.

Technology

- Rite-Temp® technology automatically maintains water temperature within 3Å°F for anti-scalding protection and precise control.

Water Conservation & Rebates

- WaterSense®-labeled 2.0-gpm showerheads use at least 20 percent less water than standard 2.5-gpm showerheads while still meeting strict performance guidelines

Recommended Accessories

K-R99801 24" Towel Bar
K-R99800 18" Towel Bar
K-R99802 Towel Ring
K-R99803 Toilet Paper Holder
K-R99804 Robe Hook

Optional Accessories

1073881 Deep Rough-in Kit

Loose component/s: Showerhead, Showerarm and flange, Valve trim plate, Diverter spout, and Rite-Temp valve.



Codes/Standards



ASME A112.18.1/CSA B125.1
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

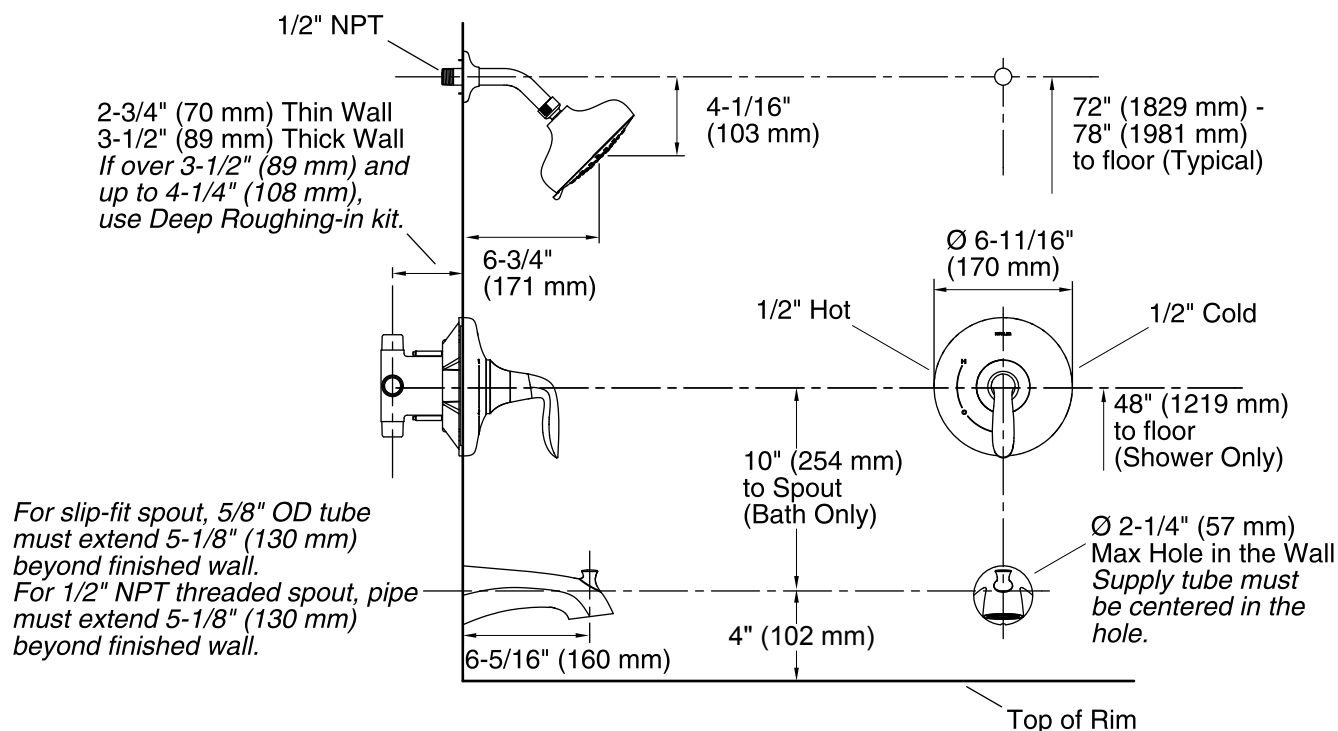

Technical Information

All product dimensions are nominal.

Valve body: Machined Brass

Shower Valve:

Flow rate - Max: 2 gal/min (7.6 l/min)
Flow rate - Min: 1.6 gal/min (6.1 l/min)
Pressure - Max: 80 psi (5.5 bar)
Pressure - Min: 45 psi (3.1 bar)

Showerhead:

Rated maximum flow: 2 gal/min (7.6 l/min)
Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.

For use with showerheads or handsprays rated at 1.6 gal/min (6.1 l/min) or higher.

Avoid cross-flow conditions. Do not install a shut-off device on either valve outlet.

Cap the shower outlet if the deck-mounted spout, diverter, or handshower is connected to the spout outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout. Elbow must be a 90 degree drop ell that is secured to rigid framing.