

Features

- Two-handle centerset bathroom sink faucet for 4" centers.
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance.
- Constructed with premium material for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.
- Simplified faucet assembly; mounting hardware requires no special tools.
- 1.2 gpm (gallons per minute) maximum flow rate.

Water Conservation & Rebates

- WaterSense®-labeled 1.2-gpm faucets use at least 45 percent less water than standard 2.2-gpm faucets while still meeting strict performance guidelines.



ADA

CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

Color Code Description



BN Vibrant® Brushed Nickel

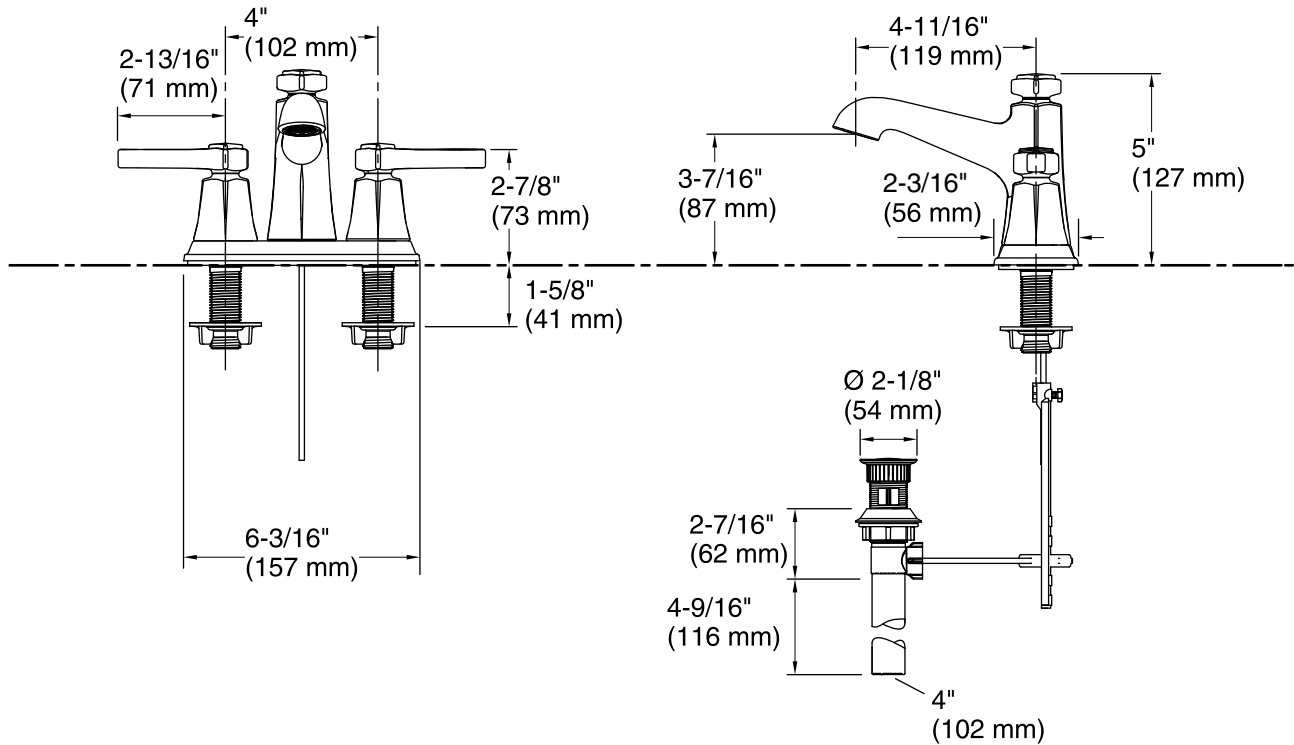

Technical Information

All product dimensions are nominal.

Drain included: YES

Drain with overflow: YES

Drain tailpiece included: YES

Spout:

Spout reach: 4-11/16" (119 mm)

Handle clearance: 2-13/16" (72 mm)

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.