

Features

- Two-handle widespread bathroom sink faucet for 8" - 16" centers.
- UltraGlide® valves, featuring advanced ceramic disc technology, improve flow and temperature control, offering consistent lifetime performance.
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance.
- Constructed with premium materials for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.
- Handles come pre-assembled on valves to simplify installation.
- 1.2 gpm (gallons per minute) maximum flow rate.

Water Conservation & Rebates

- WaterSense®-labeled 1.2-gpm faucets use at least 45 percent less water than standard 2.2-gpm faucets while still meeting strict performance guidelines.

Loose component/s: Quick Connect Tee, and Quick Connect Outlet Hoses.



ADA

CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA



ICC/ANSI A117.1


CSA B651

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze

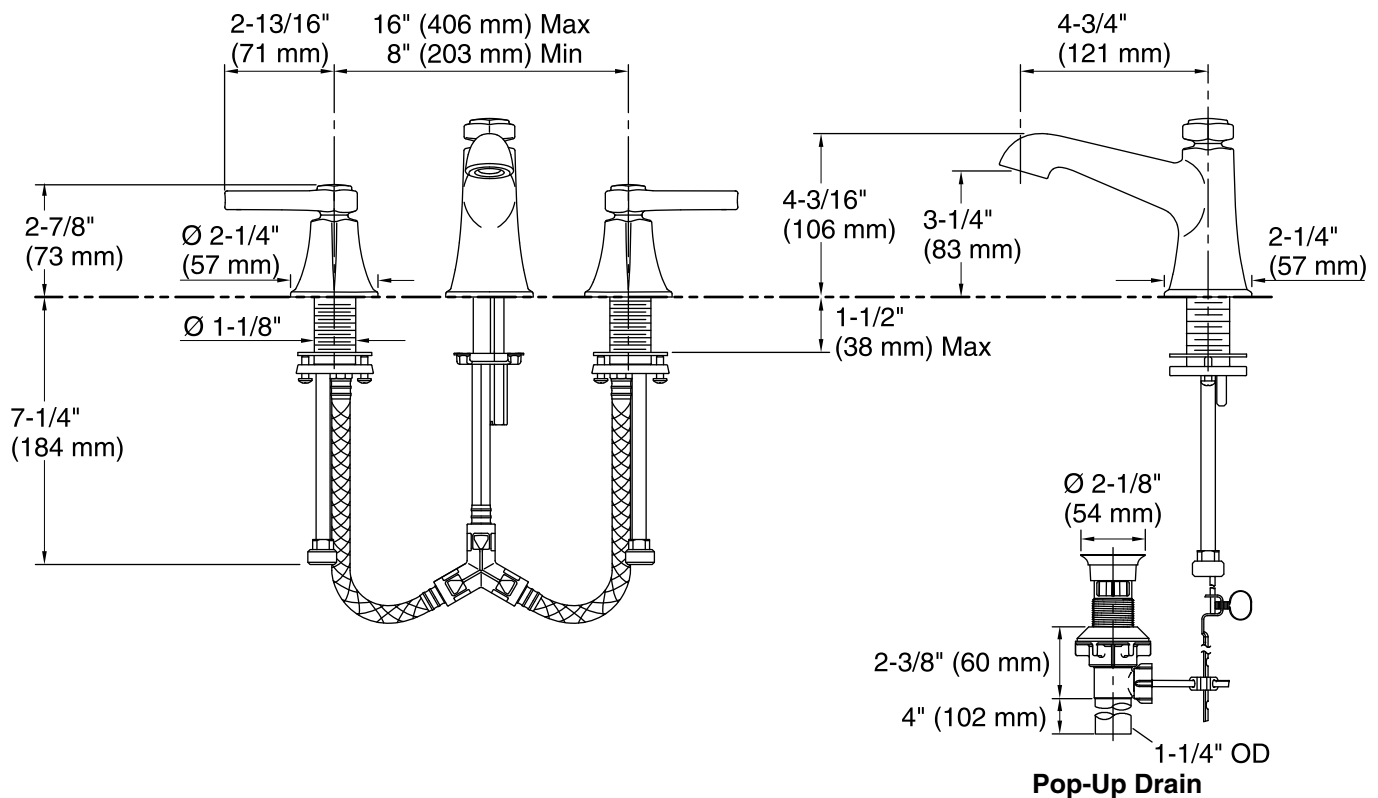

Technical Information

All product dimensions are nominal.

Drain included: YES

Drain tailpiece included: YES

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.