



# Fluence®

## Frameless Sliding Shower Door

### K-RL702208-L

#### Features

- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass door.
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning.

#### Material

- Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.
- Gently curved inside and outside towel bars.

#### Components

Additional included component/s: Hardware Kit.



#### Codes/Standards

ANSI Z97.1 (Tempered Glass)  
CPSC 16CFR 1201

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes


*Color tiles intended for reference only.*

| Color                                                                                | Code | Description            |
|--------------------------------------------------------------------------------------|------|------------------------|
|  | SHP  | Bright Polished Silver |
|  | MX   | Matte Nickel           |

#### Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

|  |               |
|--|---------------|
|  | Crystal Clear |
|--|---------------|

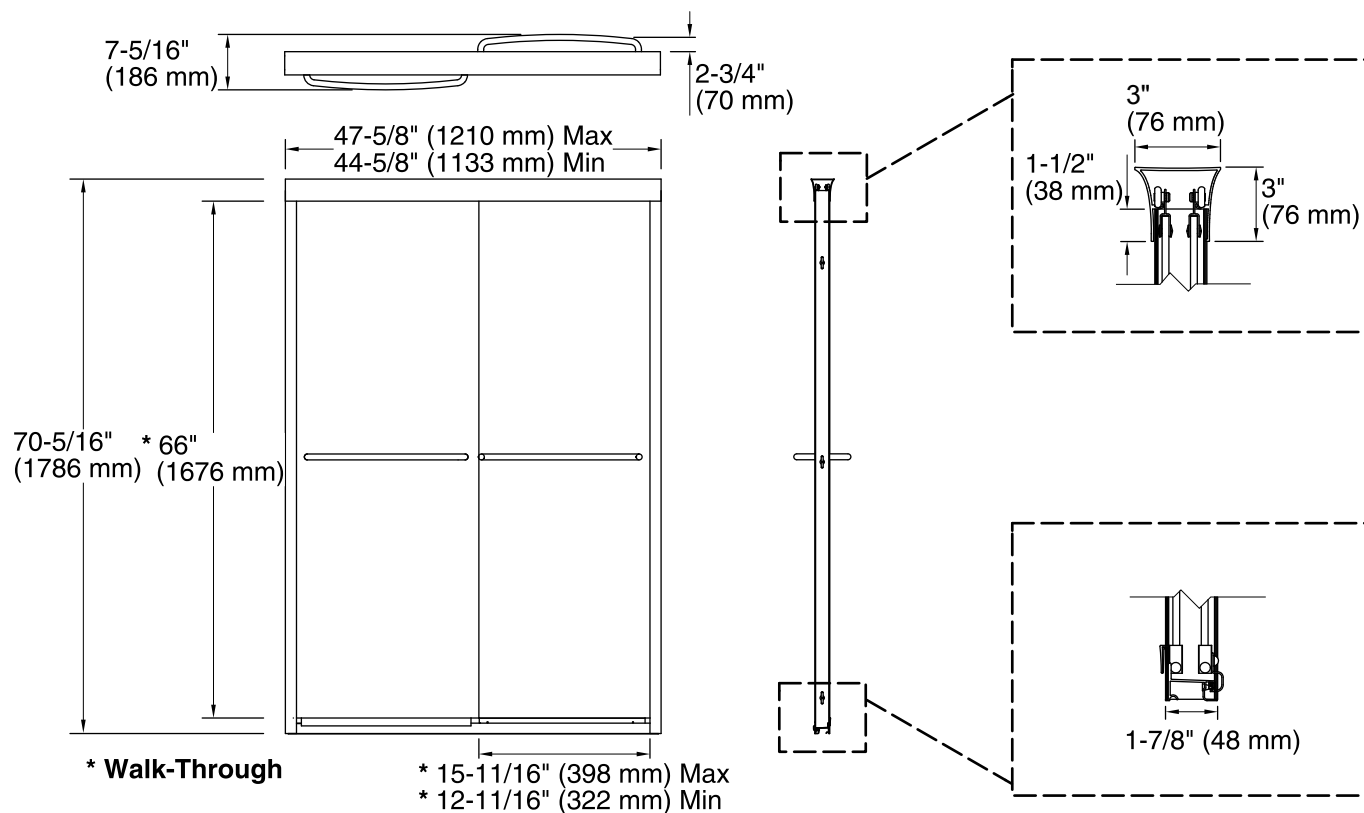

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass

Opening Width - Min: 44-5/8" (1133 mm)

Opening Width - Max: 47-5/8" (1210 mm)

Walk-through - Min: 12-11/16" (322 mm)

Walk-through - Max: 15-11/16" (398 mm)

Glass thickness: 1/4" (6 mm)

Glass coating: CleanCoat®

### Notes

Install this product according to the installation guide.

NOTICE: The vertical opening should be a minimum of 72" (1829 mm) to allow clearance for installing the top track over the wall jambs.