

### Features

- Metal construction.
- Intended for use with Rite-Temp® or HiFlow Rite-Temp® valves.
- Lever handle.
- Includes showerhead with arm and flange, 4-7/8" (124 mm) diverter spout with slip-fit connection, and faceplate with handle.
- 2.0 gal/min (7.6 l/min) maximum flow rate showerhead with Katalyst™ Spray Technology.

### Required Accessories

K-304/K-P304 Series Rite-Temp® Valves

or

K-2971-KS 3/4" Pressure-balancing Valve

### Optional Accessories

88526 Thin Wall Trim Kit



### Codes/Standards

ASME A112.18.1/CSA B125.1

ASSE 1016

DOE - Energy Policy Act 1992

California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	2BZ	Oil-Rubbed Bronze
--	-----	-------------------

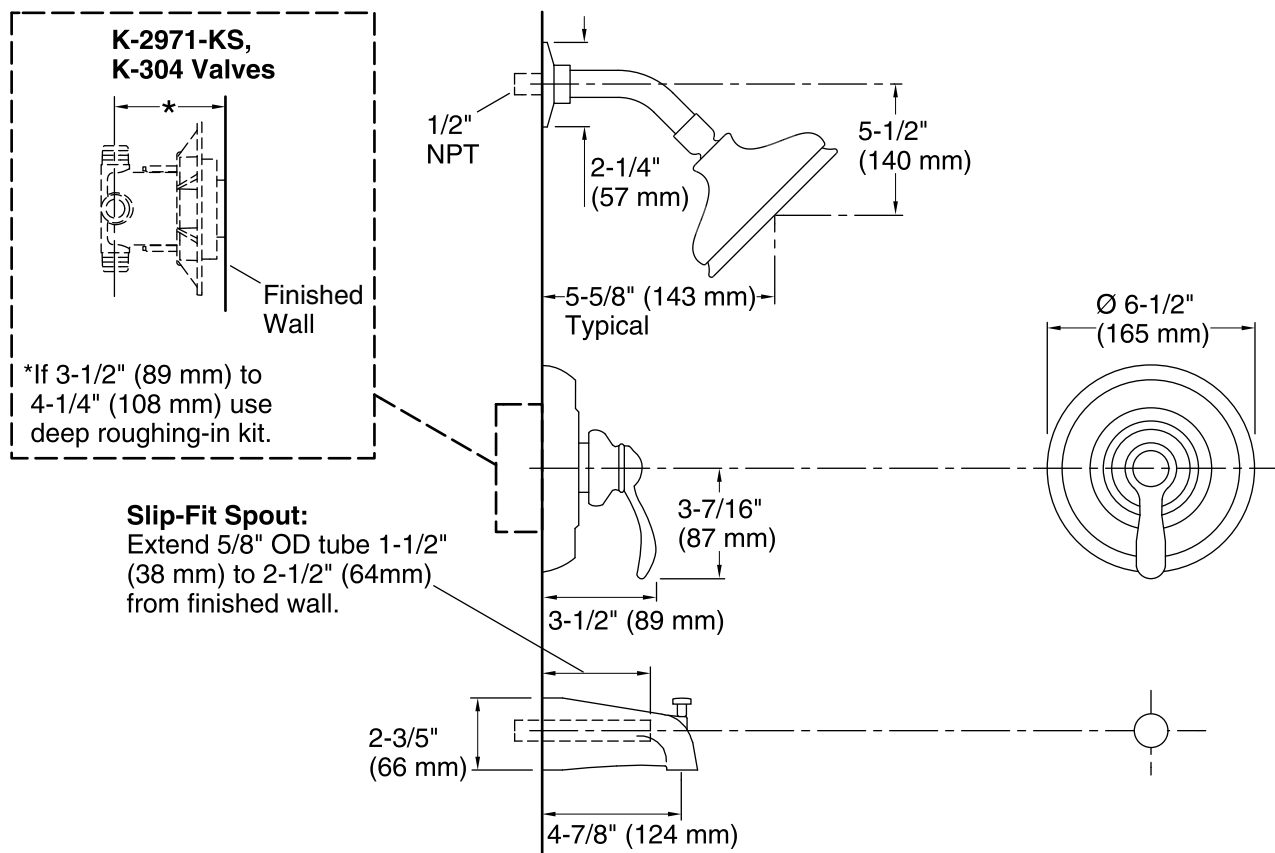

### Technical Information

All product dimensions are nominal.

#### Spout:

Spout reach: 4-7/8" (124 mm)

#### Showerhead:

Rated maximum flow: 2 gal/min (7.6 l/min)

### Notes

Install this product according to the installation guide.

**NOTICE:** Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between valve and wall-mount spout.