



# Underscore® | K-1121-RW

60" x 30" alcove bath with Bask® heated surface, right drain

## Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Customize the heat with three adjustable settings
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |             |
|----|-------------|
| 0  | White       |
| 96 | Biscuit     |
| 7  | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
5-31-2026 0:24 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*ADA compliant when installed to the specific requirements of these regulations.*



CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

ADA

ICC/ANSI A117.1

cUL Listed

UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                                       |
|------------------------|---------------------------------------|
| Drain Location:        | Right                                 |
| Drain Hole Diameter:   | 2-1/4" (57 mm)                        |
| Minimum Flat for Door: | 1-15/16" (49 mm)                      |
| Basin Area, Bottom:    | 42-7/16" x 20" (1078 mm x 508 mm)     |
| Basin Area, Top:       | 54-5/16" x 24-1/4" (1380 mm x 616 mm) |
| Water Depth:           | 15-1/8" (384 mm)                      |
| Water Capacity:        | 59.8 gal (226.4 L)                    |
| Minimum Floor Load:    | 42 lbs/ft <sup>2</sup>                |
| Weight:                | 81 lbs (36.7 kg)                      |

## Material

- Acrylic

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain

or

- K-7272 Slotted overflow bath drain

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heated Surface: 120 V, 15 A

## Electrical Component Ratings

Heated Surface: 120 V, 0.5 A, 60 Hz

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable

K-1601 Bath/whirlpool footstop, removable

K-23726 Drain treatment

K-23732 Tub & shower cleaner




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.


5-31-2026 0:24 - US-CA

No change in measurement if connected with drain illustrated. (K-7272)




Access Panel

20" (508 mm) L x 15" (381 mm) H Min



1-1/2" Bath Drain

Heater pad is located on this side

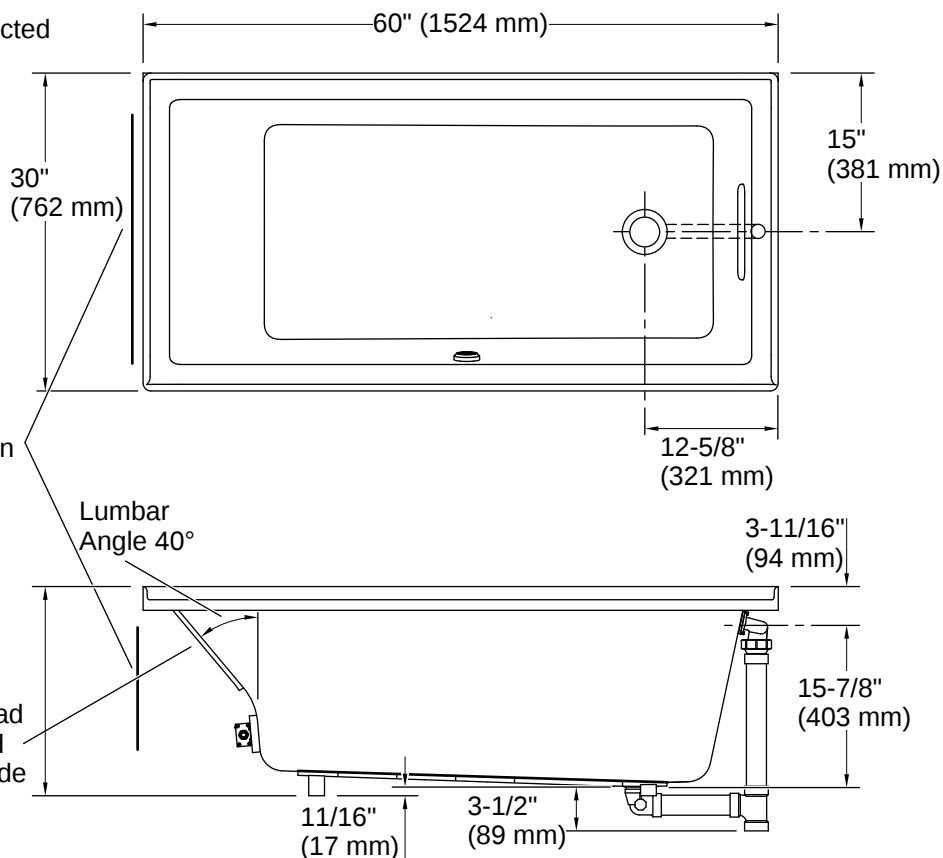

## Installation

- Right drain
- Undermount
- Alcove
- Requires 110 V electrical service
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

5-31-2026 0:24 - US-CA