



# Archer® | K-1124-GH

72" x 36" drop-in Heated BubbleMassage™ air bath

## Features

- 120 airjets release thousands of heated bubbles that surround and support the body in a warm massage
- Automatic and manual purge cycles remove residual water from air channels after use
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Textured bottom surface
- Coordinates with other products in the Archer collection
- Built-in 600W BubbleMassage™ heater warms humidified air before it enters the bath
- Automatic and manual purge cycles remove residual water from air channels after use



## Available Colors/Finishes

*Color tiles intended for reference only.*

|    |              |
|----|--------------|
| 0  | White        |
| 96 | Biscuit      |
| 95 | Ice Grey     |
| G9 | Sandbar      |
| 33 | Mexican Sand |
| K4 | Cashmere     |
| 7  | Black Black  |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:19 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



ASME A112.19.7/CSA B45.10  
 CSA B45.5/IAPMO Z124  
 ASTM E162  
 ASTM E662  
 UL 1795  
 CSA C22.2 No. 218.2  
 ADA  
 ICC/ANSI A117.1  
 cUL Listed  
 UL Listed

## Technical Information

All product dimensions are nominal.

|                        |                                      |
|------------------------|--------------------------------------|
| Drain Location:        | Reversible                           |
| Drain Hole Diameter:   | 2-1/4" (57 mm)                       |
| Minimum Flat for Door: | 1-9/16" (40 mm)                      |
| Basin Area, Bottom:    | 51-3/8" x 21" (1305 mm x 533 mm)     |
| Basin Area, Top:       | 64-1/2" x 30-1/2" (1638 mm x 775 mm) |
| Water Depth:           | 15" (381 mm)                         |
| Water Capacity:        | 72 gal (272.5 L)                     |
| Minimum Floor Load:    | 41 lbs/ft²                           |
| Weight:                | 120 lbs (54.4 kg)                    |

## Material

- Acrylic

## Recommended Products/Accessories

K-1446 Remote installation kit for BubbleMassage™ air baths  
 K-23726 Drain treatment  
 K-23732 Tub & shower cleaner

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

## Technology

- Auto-shutoff timer on blower allows users to enjoy Heated BubbleMassage™ experience for 60 minutes before turning off
- User interface: electronic keypad control

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|         |                    |
|---------|--------------------|
| Blower: | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

## Electrical Component Ratings


|         |                   |
|---------|-------------------|
| Blower: | 120 V, 10 A       |
| Heater: | 120 V, 5 A, 60 Hz |

## Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



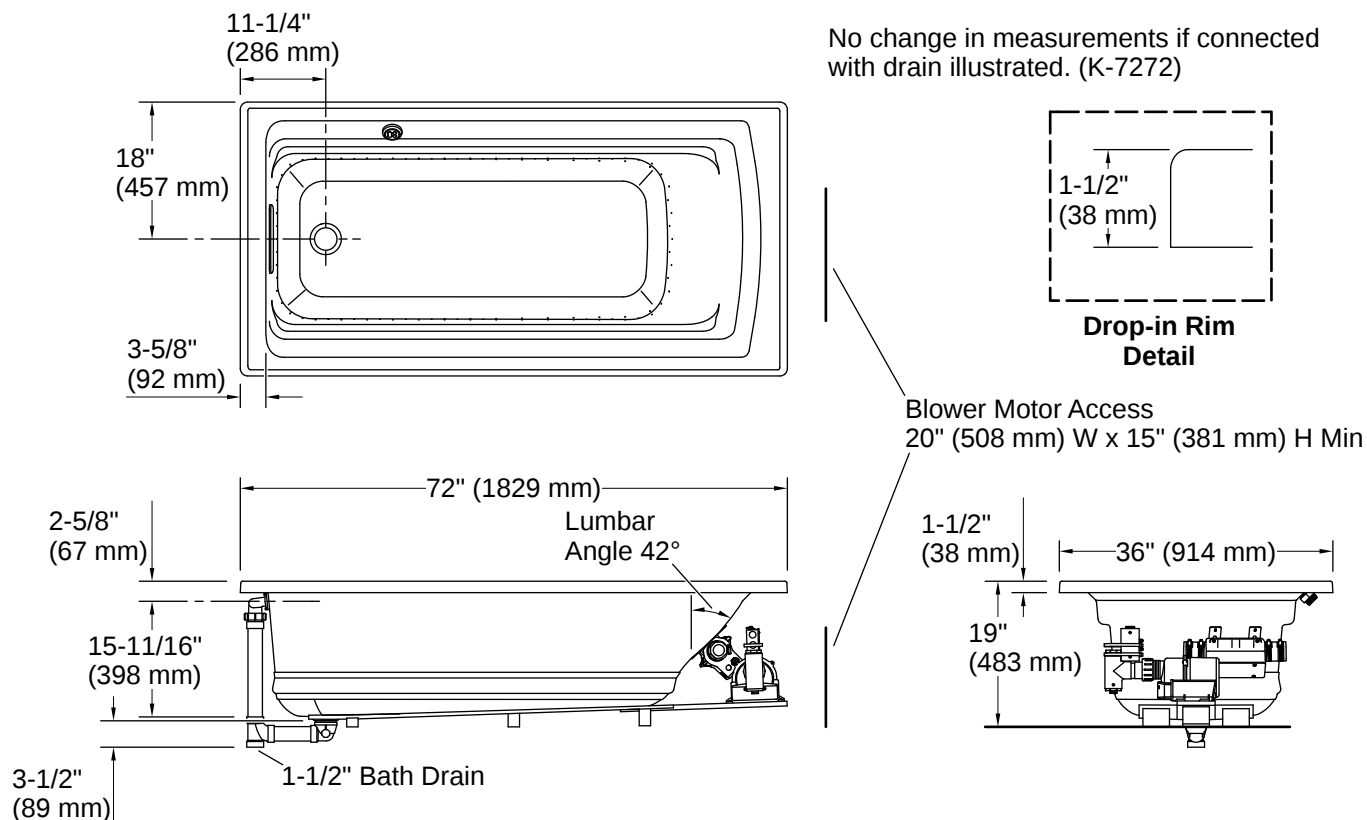

## Installation

- Reversible drain
- Drop-in
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This product is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

Remote blower installation kit is available for relocating the blower.

Provide access for servicing the blower.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:19 - US-CA

THE BOLD LOOK  
OF **KOHLER**®