



Underscore® | K-1136

66" x 36" drop-in bath

Features

- Integral lumbar support
- Slotted overflow allows for deep soaking
- 66" (1676 mm) x 36" (914 mm) x 22" (559 mm)



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-30-2026 20:10 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662

Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	2-7/16" (62 mm)
Basin Area, Bottom:	44-1/2" x 26-1/2" (1130 mm x 673 mm)
Basin Area, Top:	60-1/4" x 30-1/4" (1530 mm x 768 mm)
Water Depth:	17-3/4" (451 mm)
Water Capacity:	102 gal (386.1 L)
Minimum Floor Load:	58 lbs/ft²
Weight:	80 lbs (36.3 kg)
Cutout:	Drop-in, 65" x 35" (1651 mm x 889 mm)

Material

- Acrylic

Recommended Products/Accessories

K-591 Undermount kit for select 66" Underscore bath models
K-1177 Tiling-in bead, 144" length
K-23726 Drain treatment
K-23732 Tub & shower cleaner

Required Products/Accessories


- K-7271 Slotted overflow brass bath drain

or



- K-7272 Slotted overflow bath drain



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-30-2026 20:10 - US-CA

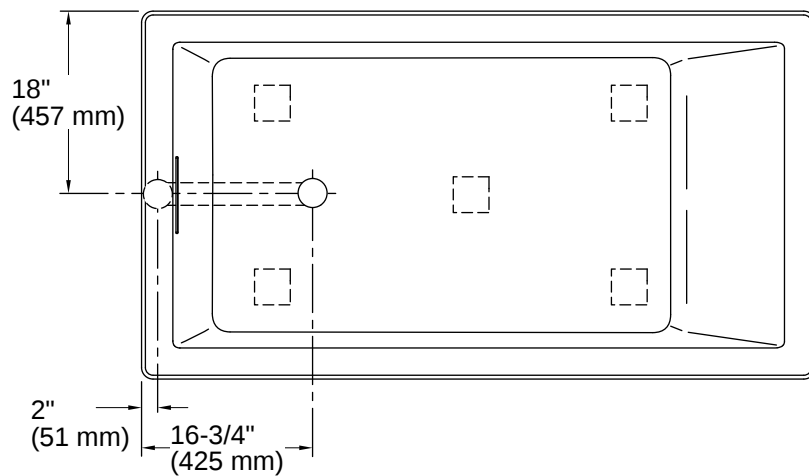

No change in measurements if connected with drain illustrated. (K-7272)

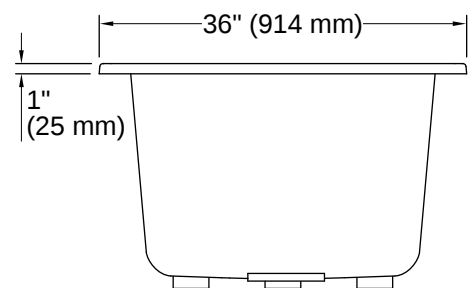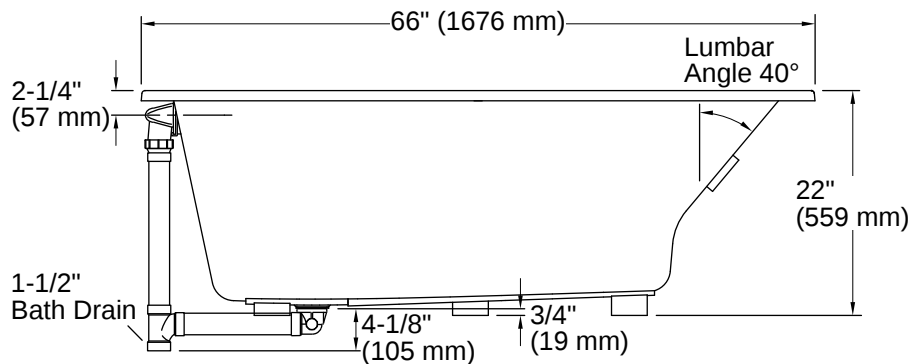

Installation

- Reversible drain
- Drop-in or undermount
- Requires Clearflo slotted overflow bath drain (sold separately)

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-30-2026 20:10 - US-CA