



# Sunward® | K-1164-H

72" x 42" drop-in heated whirlpool bath

## Features

- Single-speed whirlpool offers performance and value, with six fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Built-in heater
- Oval basin creates a spacious bathing experience
- Integral lumbar support and armrests offer extra comfort while bathing



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |         |
|----|---------|
| 0  | White   |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:20 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
 CSA B45.5/IAPMO Z124  
 UL 1795  
 CSA C22.2 No. 218.2  
 cUL Listed  
 UL Listed

## Technical Information

*All product dimensions are nominal.*

|                      |                                      |
|----------------------|--------------------------------------|
| Drain Location:      | Reversible                           |
| Drain Hole Diameter: | 2-1/4" (57 mm)                       |
| Basin Area, Bottom:  | 55-1/4" x 23-1/2" (1403 mm x 597 mm) |
| Basin Area, Top:     | 64-1/2" x 32" (1638 mm x 813 mm)     |
| Water Depth:         | 15" (381 mm)                         |
| Water Capacity:      | 75 gal (283.9 L)                     |
| Minimum Floor Load:  | 37 lbs/ft <sup>2</sup>               |
| Weight:              | 112 lbs (50.8 kg)                    |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
 K-1601 Bath/whirlpool footstop, removable  
 K-23726 Drain treatment  
 K-23732 Tub & shower cleaner  
 K-11677 Adjustable drain, 20-gauge brass, for 18-1/2" to 20-1/2" baths  
 K-577 Undermount kit for select 72" Sunward bath and whirlpool bath models  
 K-7213 Cable bath drain with PVC tubing  
 K-7214 Cable bath drain, less PVC tubing  
 K-7259 Brass toe tap bath drain

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

## Electrical Component Ratings

Pump: 120 V, 7.5 A, 60 Hz

Number of Speeds: Single


Heater: 120 V, 12.5 A, 60 Hz, 1500 W

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



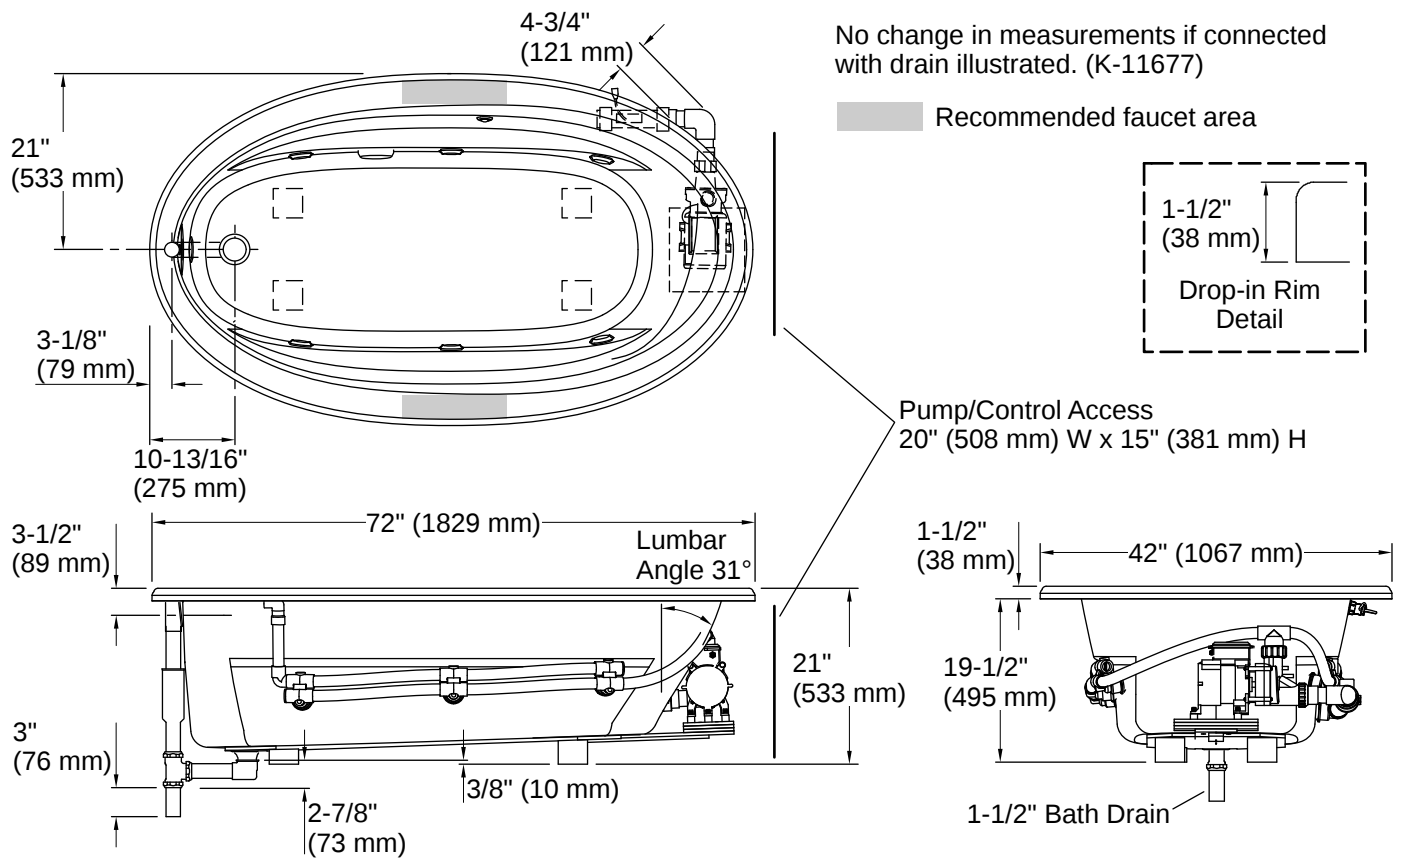

## Installation

- Reversible drain
- Drop-in or undermount

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:20 - US-CA

THE BOLD LOOK  
OF **KOHLER**®