



sok® | K-1166-RE

104" x 41" drop-in Effervescence bath

Features

- Built-in heater
- Remote control
- Overflow channel for deep soak and unique infinity pool effect
- Spacious design accommodates up to two bathers



Available Colors/Finishes

Color tiles intended for reference only.

0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-18-2026 21:13 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.7/CSA B45.10
 CSA B45.5/IAPMO Z124
 ASTM E162
 ASTM E662
 UL 1795
 CSA C22.2 No. 218.2
 cUL Listed
 UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Center
Drain Hole Diameter:	2-1/4" (57 mm)
Basin Area, Bottom:	60" x 25-1/2" (1524 mm x 648 mm)
Basin Area, Top:	84" x 31-1/2" (2134 mm x 800 mm)
Water Depth:	24-5/8" (625 mm)
Water Capacity:	185 gal (700.3 L)
Minimum Floor Load:	62 lbs/ft ²
Weight:	480 lbs (217.7 kg)
Cutout:	Drop-in, 102-1/4" x 40" (2597 mm x 1016 mm)

Material

- Acrylic

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 240 V, 20 A, 50/60 Hz

Heater: 240 V, 20 A, 50/60 Hz

Electrical Component Ratings

Pump: 240 V, 4 A, 50/60 Hz

Number of Speeds: Variable

Heater: 240 V, 15 A, 50/60 Hz, 4000 W

Warranty

See website for detailed warranty information.

KOHLER® Hydrotherapy Components Five-Year Limited
 Warranty|KOHLER® Plastic Baths and Shower Bases Lifetime Limited
 Warranty

Recommended Products/Accessories


K-1601 Bath/whirlpool footstop, removable
 K-23726 Drain treatment
 K-23732 Tub & shower cleaner
 K-7223 Pop-up bath drain
 K-922 Wall- or -ceiling-mount bath filler
 K-923 Wall- or -ceiling-mount bath filler



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 6-18-2026 21:13 - US-CA

No change in measurements if connected with drain illustrated. (K-7223)

Cut-out: 102-1/4" (2597 mm) x 40" (1016 mm)

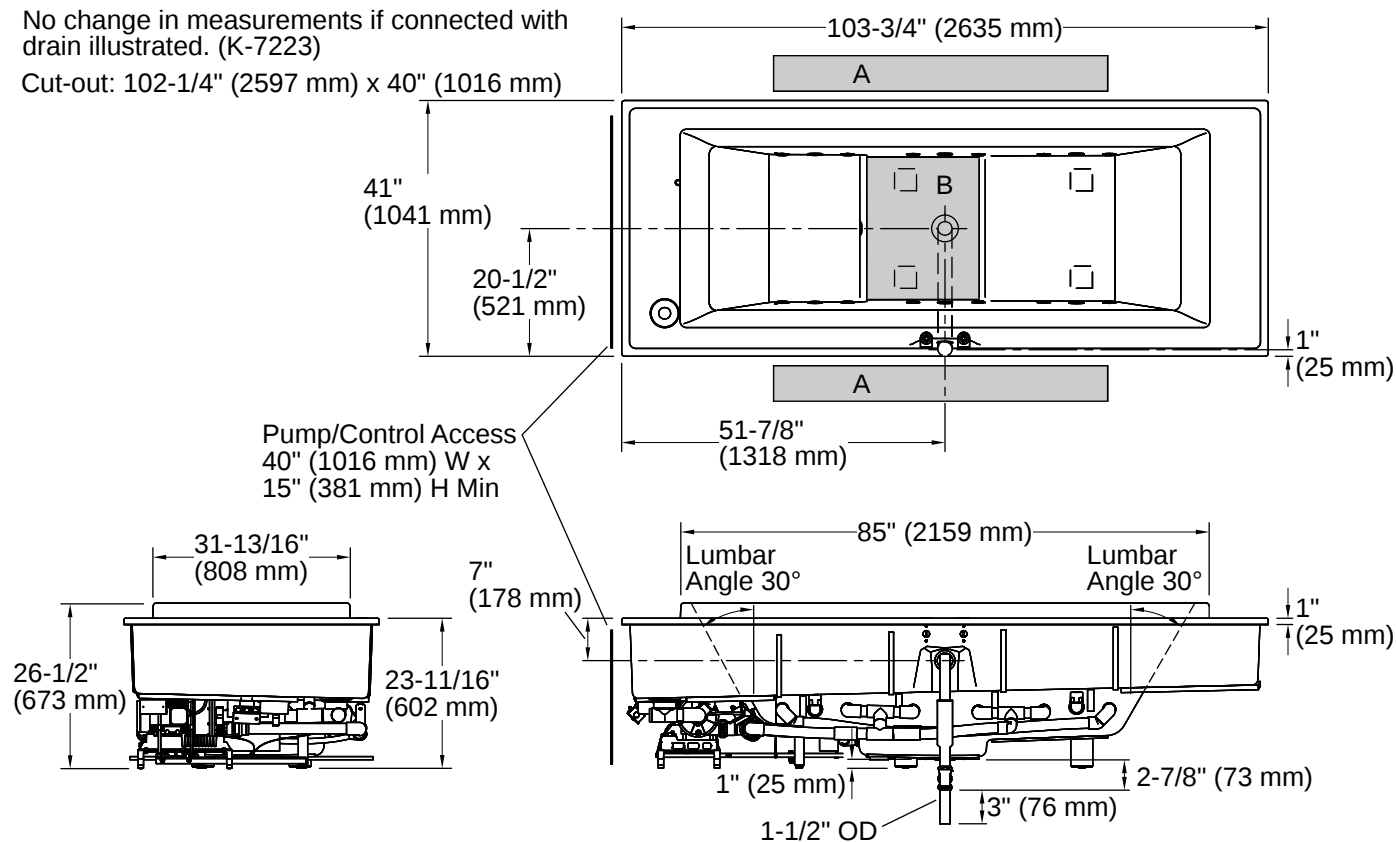

Installation

- Center drain
- Drop-in

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Unit must be filled through the bathing well.

Consult local and national codes for minimum air gap requirements when installing a spout on the faucet deck.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-18-2026 21:13 - US-CA

THE BOLD LOOK
OF **KOHLER**®