



# Underscore® | K-1167-JLH

60" x 30" drop-in/alcove heated whirlpool bath, left drain

## Features

- Eight Proflex® hydromassage jets can be individually adjusted for water flow and direction
- Single-speed whirlpool offers performance and value with 8 fully adjustable jets
- Built-in heater
- Slotted overflow allows for deep soaking
- Integral lumbar support
- Textured bottom surface



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |             |
|----|-------------|
| 0  | White       |
| 96 | Biscuit     |
| 95 | Ice Grey    |
| 7  | Black Black |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:9 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



ASME A112.19.7/CSA B45.10  
 CSA B45.5/IAPMO Z124  
 ASTM E162  
 ASTM E662  
 UL 1795  
 CSA C22.2 No. 218.2  
 ADA  
 ICC/ANSI A117.1  
 cUL Listed  
 UL Listed

## Technical Information

All product dimensions are nominal.

|                        |                                               |
|------------------------|-----------------------------------------------|
| Drain Location:        | Left                                          |
| Drain Hole Diameter:   | 2-1/4" (57 mm)                                |
| Minimum Flat for Door: | 2" (51 mm)                                    |
| Basin Area, Bottom:    | 42-7/16" x 20" (1078 mm x 508 mm)             |
| Basin Area, Top:       | 54-5/16" x 24-1/4" (1380 mm x 617 mm)         |
| Water Depth:           | 14-3/4" (374 mm)                              |
| Water Capacity:        | 59.8 gal (226.4 L)                            |
| Minimum Floor Load:    | 46 lbs/ft <sup>2</sup>                        |
| Weight:                | 120 lbs (54.4 kg)                             |
| Cutout:                | Drop-in, 59-1/2" x 28-1/2" (1511 mm x 724 mm) |

## Material

- Acrylic

## Recommended Products/Accessories

- K-1491 Bath/whirlpool pillow, removable
- K-1601 Bath/whirlpool footstop, removable
- K-706000-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass
- K-706000-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass
- K-706003-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass
- K-706004-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass
- K-706004-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass
- K-706007-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|         |                    |
|---------|--------------------|
| Pump:   | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

## Electrical Component Ratings


|         |                    |
|---------|--------------------|
| Pump:   | 120 V, 7 A, 60 Hz  |
| Heater: | 120 V, 12 A, 60 Hz |

## Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited  
 Warranty|KOHLER® Hydrotherapy Components Five-Year Limited  
 Warranty



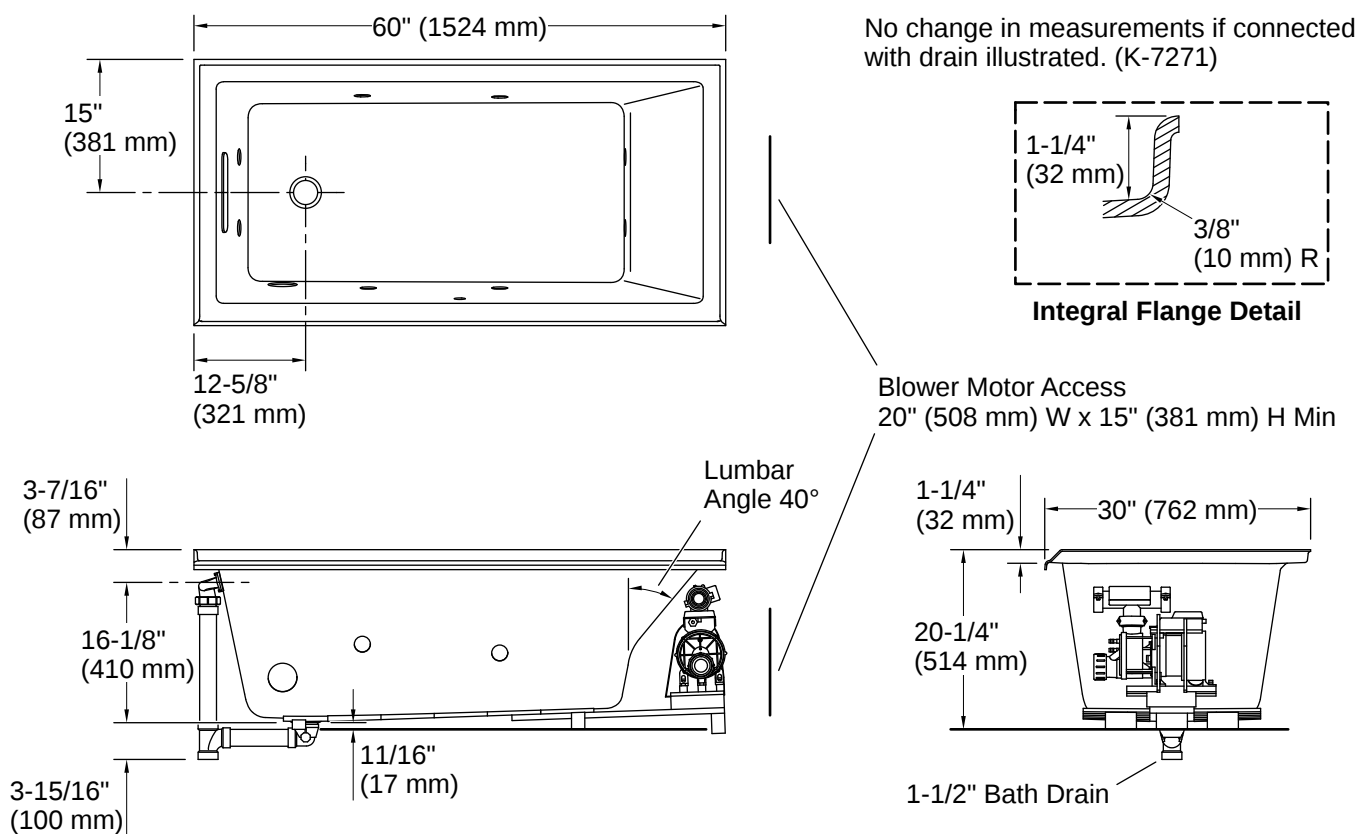

## Installation

- Alcove
- Integral flange
- Left drain
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

