



# Memoirs® | K-1170-JHC

66" x 42" drop-in whirlpool bath

## Features

- Eight Proflex® hydromassage jets can be individually adjusted for water flow and direction
- Built-in heater
- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Spacious design accommodates up to two bathers
- Integral lumbar support
- Multiple pump location options give you more choices for installation and access
- Coordinates with other products in the Memoirs collection



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |         |
|----|---------|
| 0  | White   |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
5-30-2026 23:16 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
cUL Listed  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                              |
|------------------------|------------------------------|
| Drain Location:        | Center                       |
| Drain Hole Diameter:   | 2-1/4" (57 mm)               |
| Minimum Flat for Door: | 3-13/16" (97 mm)             |
| Basin Area, Bottom:    | 42" x 27" (1067 mm x 686 mm) |
| Basin Area, Top:       | 54" x 30" (1372 mm x 762 mm) |
| Water Depth:           | 16" (406 mm)                 |
| Water Capacity:        | 81 gal (306.6 L)             |
| Minimum Floor Load:    | 44 lbs/ft <sup>2</sup>       |
| Weight:                | 129 lbs (58.5 kg)            |

## Material

- Acrylic

## Recommended Products/Accessories

K-1446 Remote installation kit for BubbleMassage™ air baths  
K-1491 Bath/whirlpool pillow, removable  
K-1601 Bath/whirlpool footstop, removable  
K-1177 Tiling-in bead, 144" length  
K-7213 Cable bath drain with PVC tubing  
K-7214 Cable bath drain, less PVC tubing  
K-7259 Brass toe tap bath drain

## Required Products/Accessories

- K-11677 Adjustable drain, 20-gauge brass, for 18-1/2" to 20-1/2" baths
- or
- K-T37392 Rotary-turn bath drain trim
- K-T37391 Rotary-turn bath drain trim
- or
- K-78438 30" cable bath drain
- K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing
- or
- K-78439 45" cable bath drain
- K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube

## Technology

- Whirlpool jets recirculate water, providing targeted relief for the bather

## Required Electrical Service

Two dedicated circuits required.

|         |                    |
|---------|--------------------|
| Pump:   | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

## Electrical Component Ratings

|         |                    |
|---------|--------------------|
| Pump:   | 120 V, 7 A, 60 Hz  |
| Heater: | 120 V, 12 A, 60 Hz |


## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty






No change in measurements if connected with drain illustrated. (K-7161-AF)



**Drop-in Rim Detail**

Blower Control Access  
20" (508 mm) W x 15" (381 mm) H

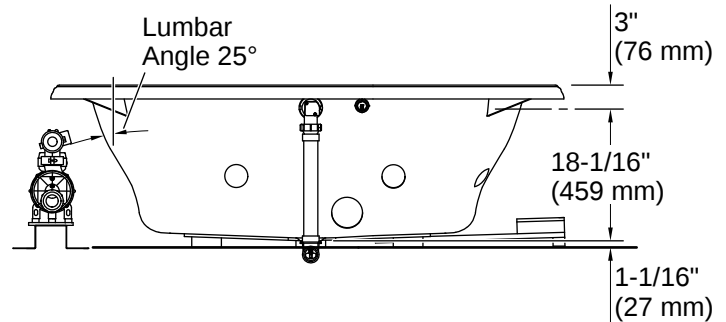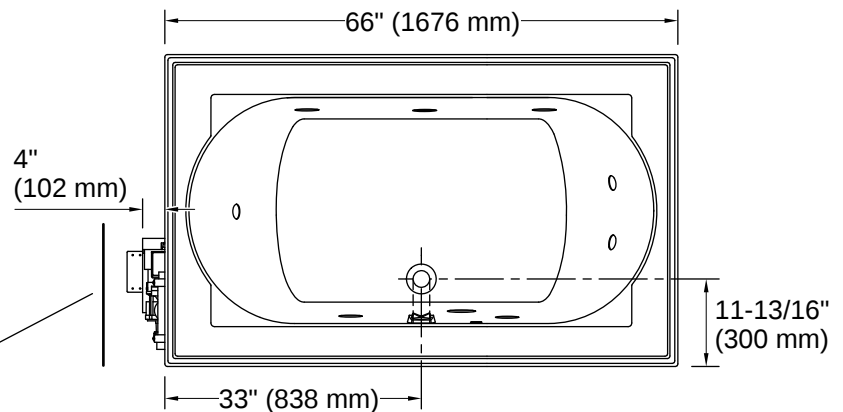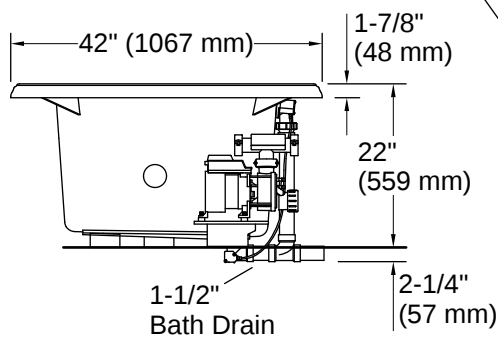

## Installation

- Drop-in
- Rear center drain

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
5-30-2026 23:16 - US-CA