



# Mariposa® | K-1257-W1

72" x 36" drop-in whirlpool bath with Bask® heated surface

## Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Three heat settings allow you to customize the surface temperature
- Single-speed whirlpool offers performance and value, with 5 fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Spacious design accommodates up to two bathers
- Textured bottom surface



## Available Colors/Finishes

*Color tiles intended for reference only.*

0 White



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:11 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                      |                                       |
|----------------------|---------------------------------------|
| Drain Location:      | Reversible                            |
| Drain Hole Diameter: | 2-1/4" (57 mm)                        |
| Basin Area, Bottom:  | 50" x 24" (1270 mm x 610 mm)          |
| Basin Area, Top:     | 65" x 27" (1651 mm x 686 mm)          |
| Water Depth:         | 14" (356 mm)                          |
| Water Capacity:      | 72 gal (272.5 L)                      |
| Minimum Floor Load:  | 41 lbs/ft <sup>2</sup>                |
| Weight:              | 116 lbs (52.6 kg)                     |
| Cutout:              | Drop-in, 70" x 34" (1778 mm x 864 mm) |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner  
K-7265 Brass toe tap bath drain  
1015255 Jet Trim Kit

## Required Products/Accessories

- K-T37392 Rotary-turn bath drain trim
  - K-T37391 Rotary-turn bath drain trim
- or
- K-78438 30" cable bath drain
  - K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heated Surface: 120 V, 15 A, 60 Hz

## Electrical Component Ratings


Pump: 120 V, 7 A, 60 Hz  
Number of Speeds: Single  
Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited  
Warranty|KOHLER® Hydrotherapy Components Five-Year Limited  
Warranty



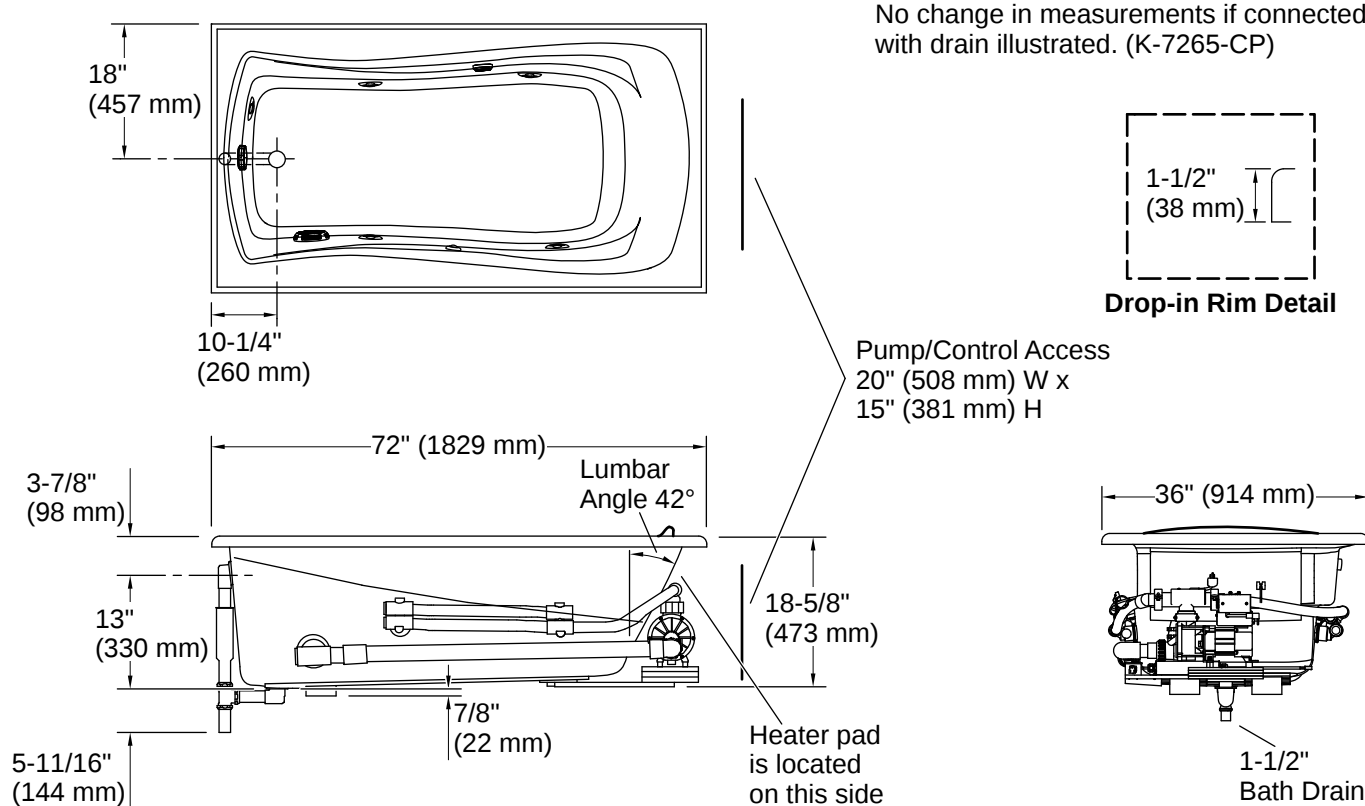

## Installation

- Reversible drain
- Drop-in

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

6-18-2026 21:11 - US-CA