



Devonshire® | K-1357

60" x 32" drop-in whirlpool bath

Features

- Single-speed whirlpool offers performance and value with 8 fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Integral lumbar support and armrests offer extra comfort while bathing
- Textured bottom surface
- Coordinates with other products in the Devonshire collection



Available Colors/Finishes

Color tiles intended for reference only.

0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-18-2026 21:13 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.7/CSA B45.10
 CSA B45.5/IAPMO Z124
 ASTM E162
 ASTM E662
 UL 1795
 CSA C22.2 No. 218.2
 UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	2-1/2" (64 mm)
Basin Area, Bottom:	42" x 20" (1067 mm x 508 mm)
Basin Area, Top:	51" x 24" (1295 mm x 610 mm)
Water Depth:	14" (356 mm)
Water Capacity:	60 gal (227.1 L)
Minimum Floor Load:	47 lbs/ft ²
Weight:	100 lbs (45.4 kg)
Cutout:	Drop-in, 58" x 30" (1473 mm x 762 mm)

Material

- Acrylic

Recommended Products/Accessories

K-1177 Tiling-in bead, 144" length
 K-1491 Bath/whirlpool pillow, removable
 K-1601 Bath/whirlpool footstop, removable
 K-23726 Drain treatment
 K-23732 Tub & shower cleaner
 K-706000-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass
 K-706000-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass
 K-706003-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass
 K-706004-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass
 K-706004-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass
 K-706007-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass

Required Products/Accessories

- K-7214 Cable bath drain, less PVC tubing
- or
- K-7213 Cable bath drain with PVC tubing
- or
- K-T37391 Rotary-turn bath drain trim
- K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube
- or
- K-T37392 Rotary-turn bath drain trim
- K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube
- or
- K-T37391 Rotary-turn bath drain trim
- K-78439 45" cable bath drain
- or
- K-T37392 Rotary-turn bath drain trim
- K-78439 45" cable bath drain
- or
- K-7259 Brass toe tap bath drain



Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Electrical Component Ratings

Pump: 120 V, 7 A, 60 Hz

Number of Speeds: Single


Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited
Warranty/KOHLER® Hydrotherapy Components Five-Year Limited
Warranty



No change in measurements with drain shown. (K-7161-AF)

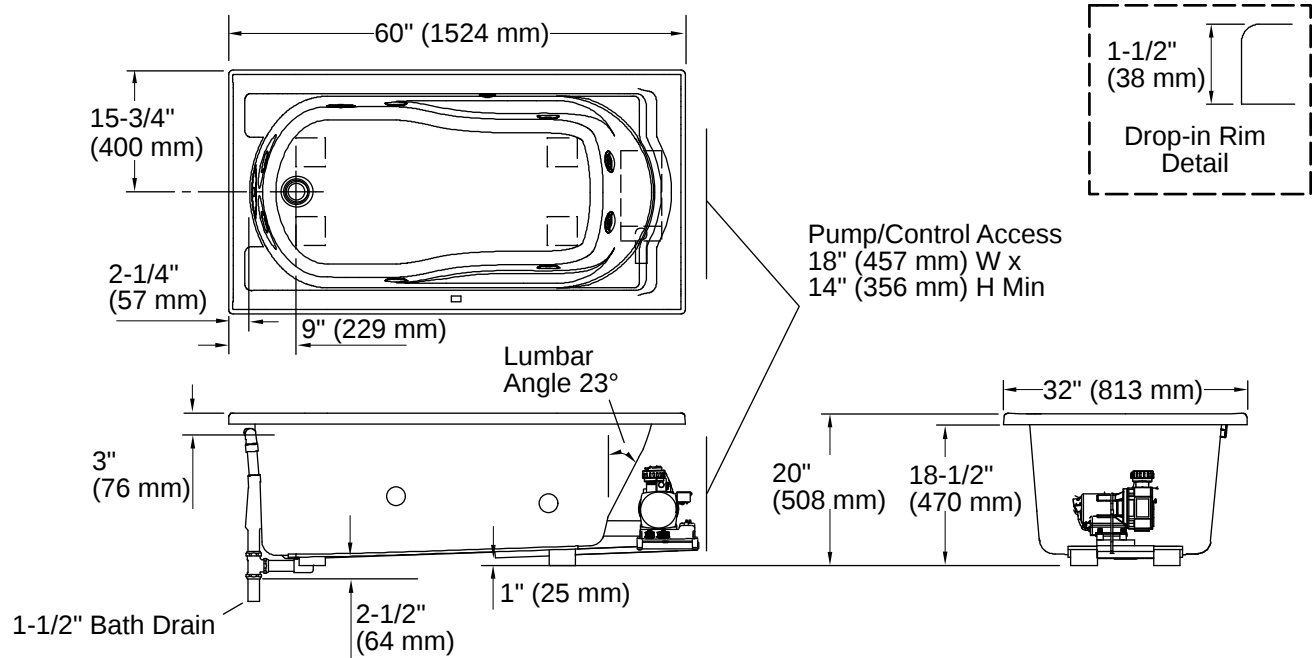

Installation

- Reversible drain
- Drop-in

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

